



Update Firmware BSC10E support Thai UTF-8


1. Double click MOT2FMEMNIC.exe
Click "Discovery" Please Check box BSC10
Check both "Mode-ID protection" and "Status Protection" Then Click **File**


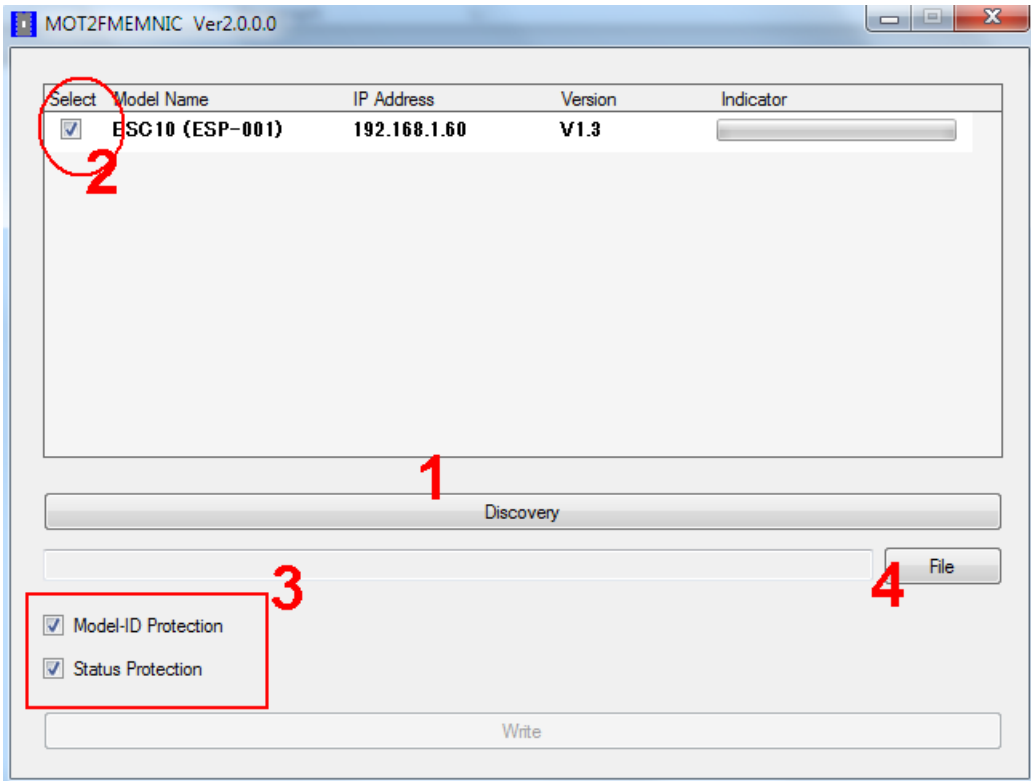


2. Select firmware file "BSC10E_V13_170726(Main).mot" then Click Open

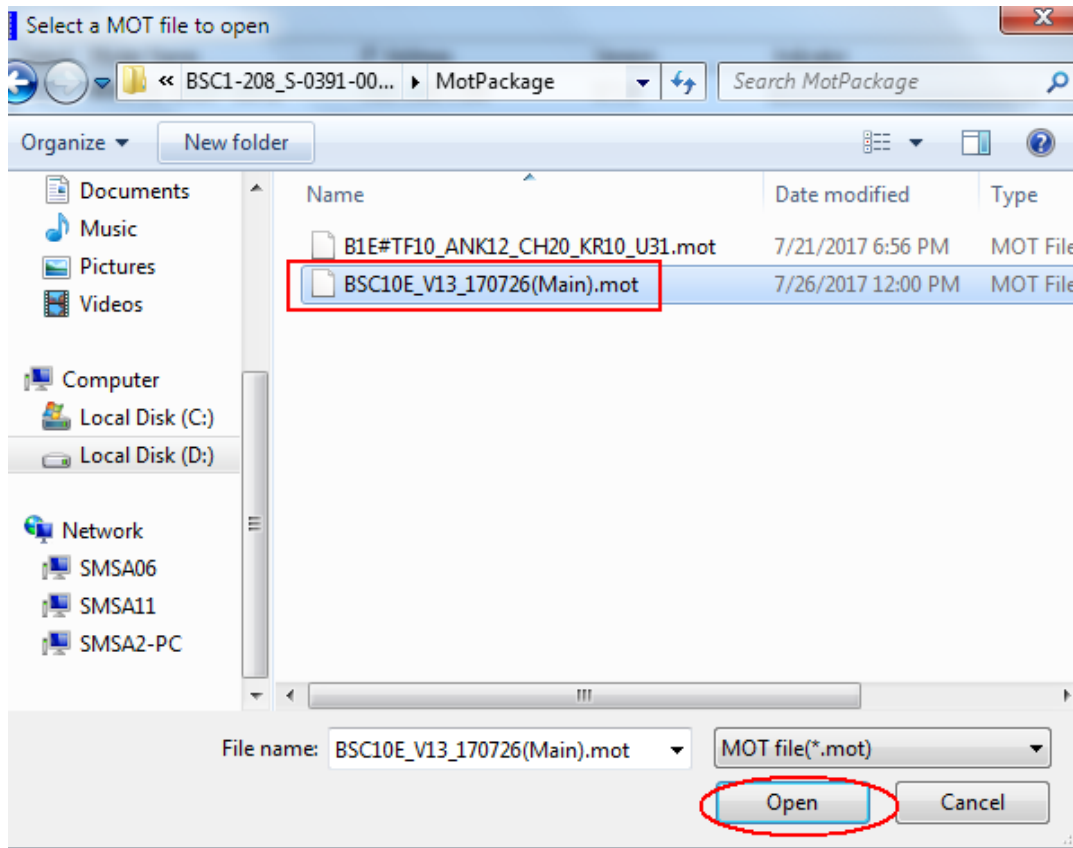

Then Click **Write**

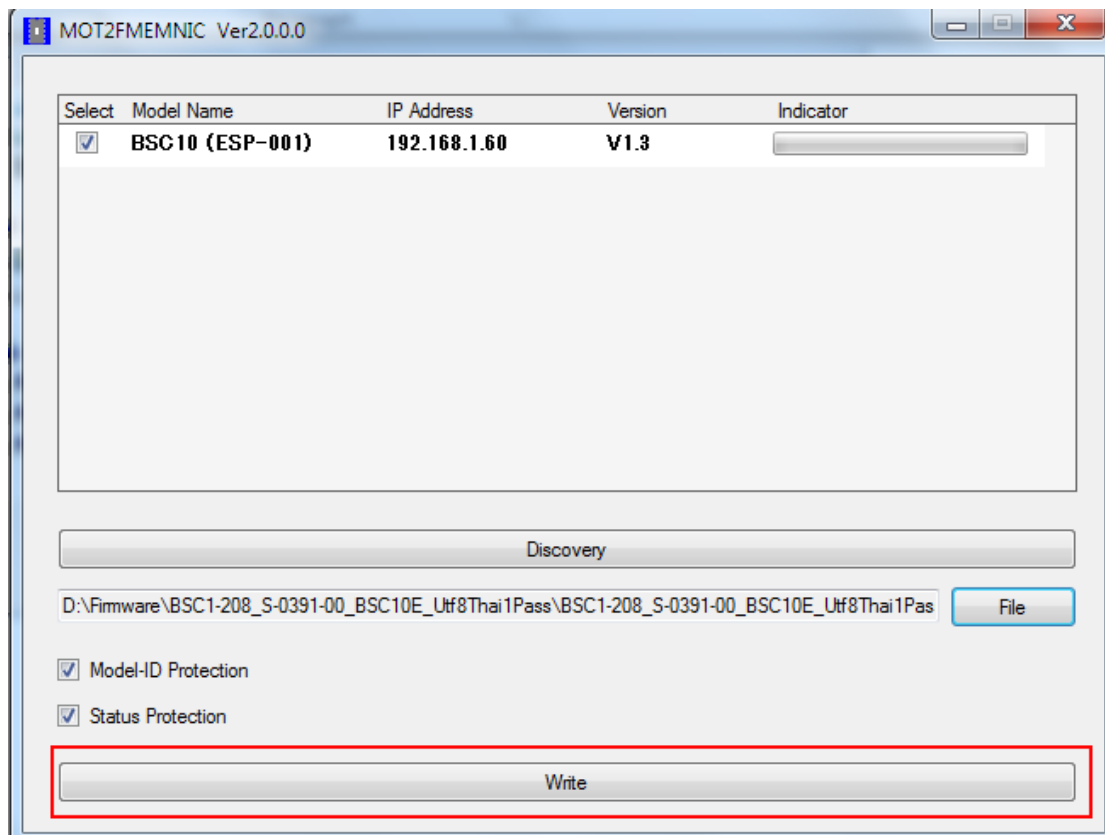


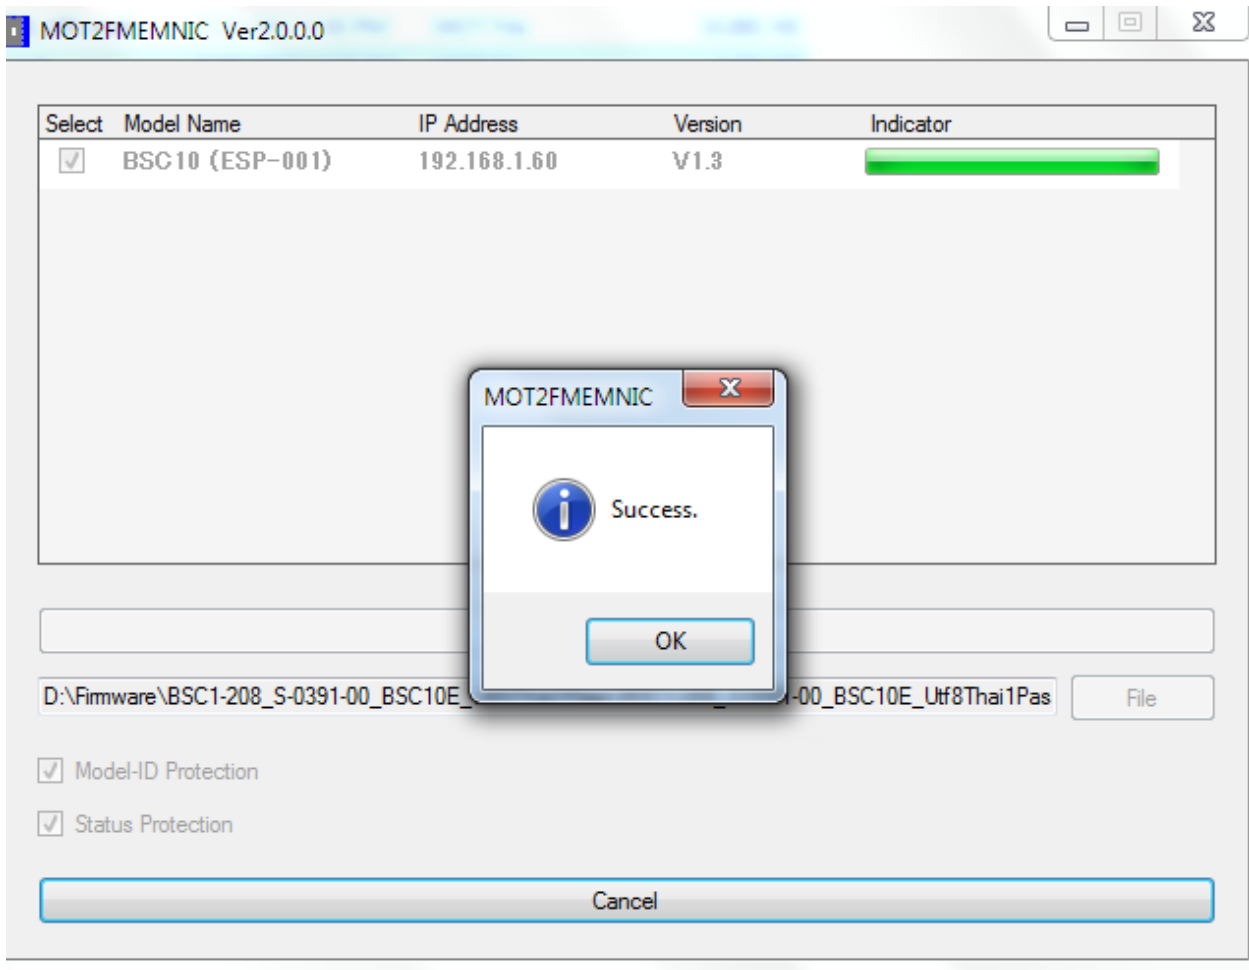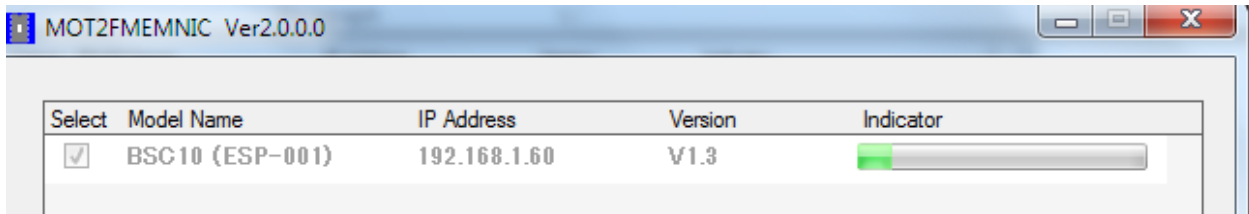


Wait for printer update firmware until green LED on

Re-write Font (Don't forget)


1. Double click MOT2FMEMNIC.exe
Click "Discovery" Please Check box BSC10
Un Check "Mode-ID protection" and "Status Protection" Then Click **File**


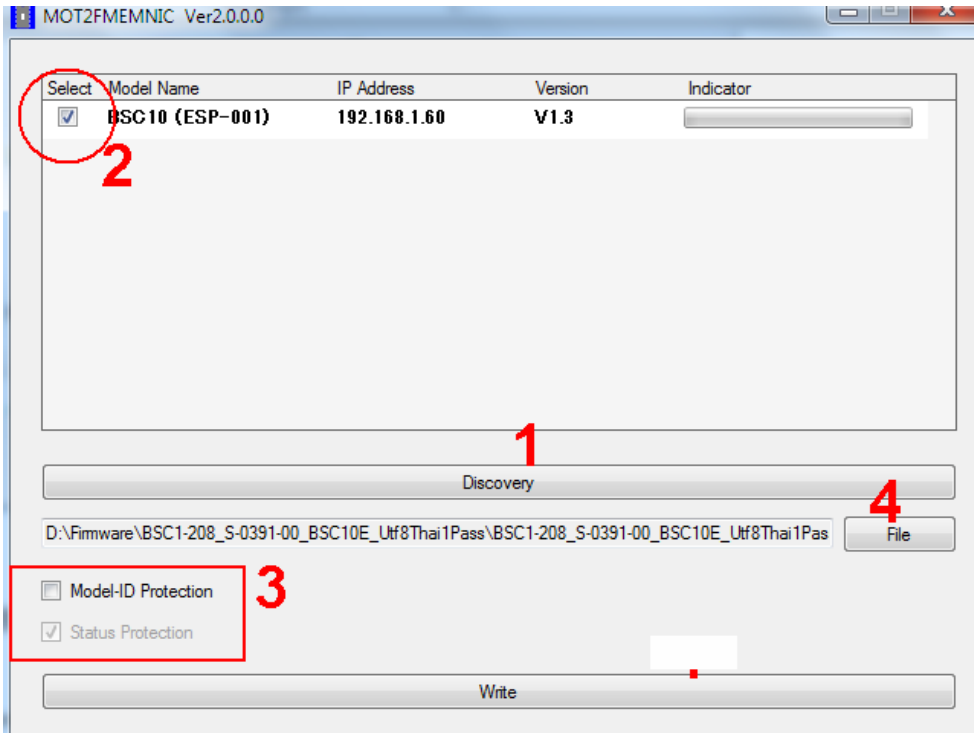


2. Select firmware file "B1E#TF10_ANK12_CH20_KR10_U31.mot" then Click Open

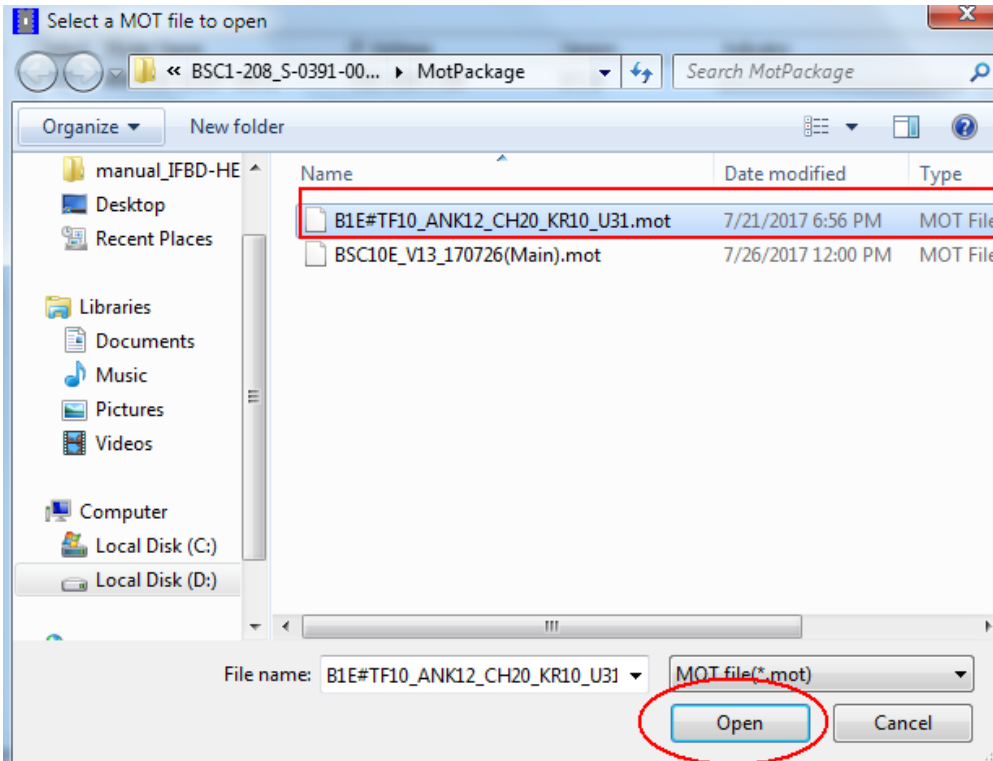

Then Click **Write**

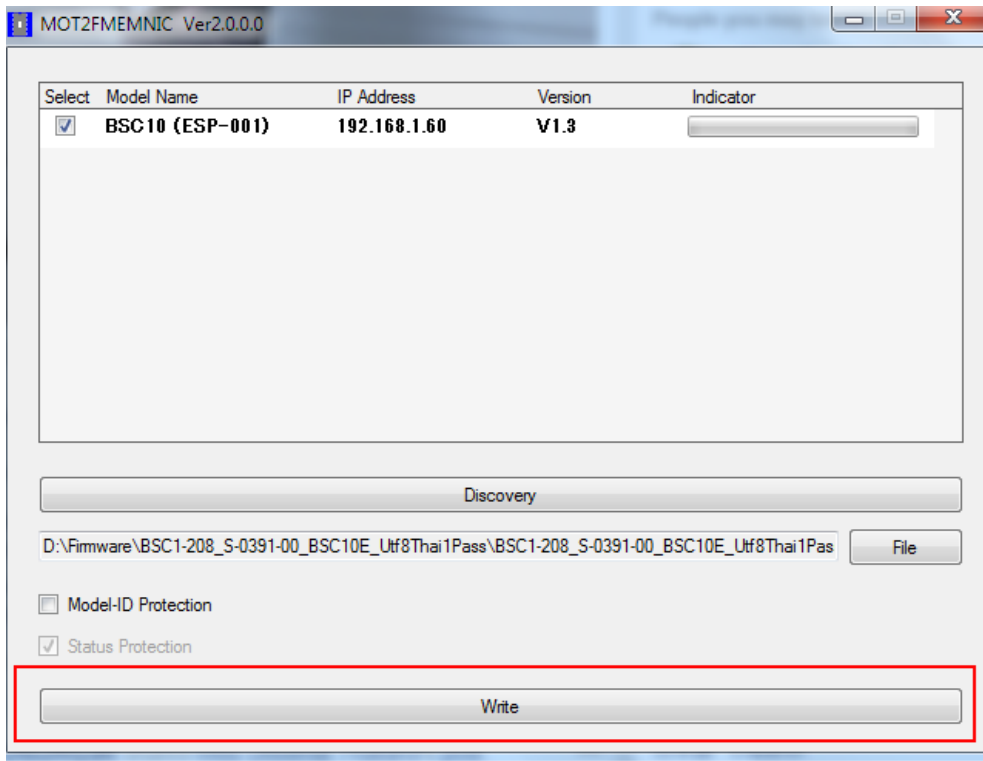

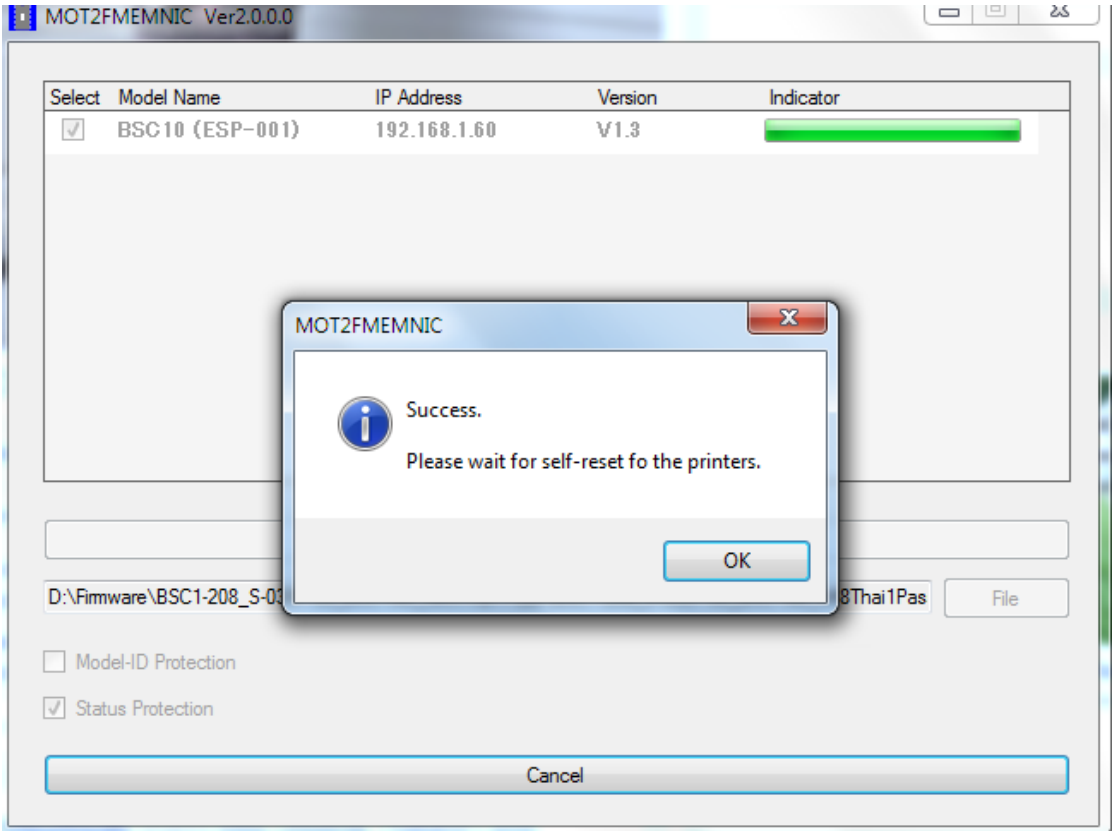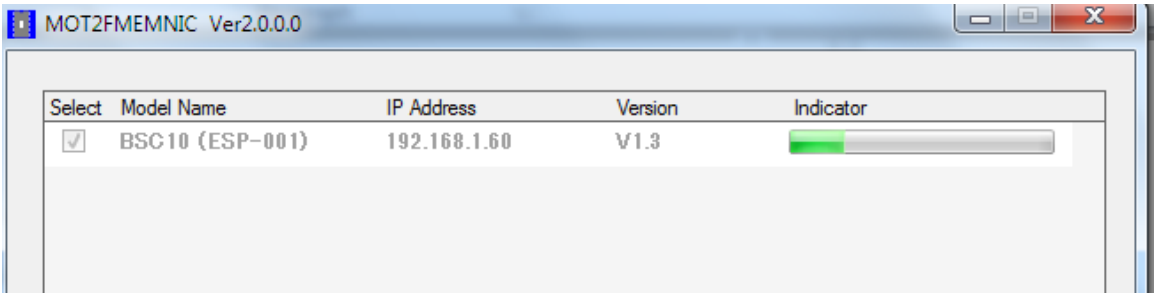

Please check self-test

Firmware version must be " BSC10LAN Ver1.3 170726-b1.3 "

And Character Mode: Standard - U31

*** BSC10 LAN Ver1.3 170726-b1.3 ***

-- Memory Switch --

FEDCBA9876543210 HEX.
<0> 0000001000000000 0200
<1> 0000000000000000 0000
<2> 0000000000000000 0000
<3> 0000000000000000 0000
<4> 0000000000000000 0000
<7> 0000000000000000 0000
<8> 0000000000000000 0000

-- Memory Switch Detail --

<0>4 = Character Mode: Standard -U3.1
<1>9 = Top Margin: Default
<1>7 = Large Font: Valid
<2>C = 180 Rotation: Invalid
<2>A = Print Start Control: Line
<2>5,4 = Print Speed: Normal
<2>2-0 = Print Density: Standard
<4>C = Motion Unit: Dot by dot
<4>4 = Character/Line: ESC/POS
<4>2-0 = Printable Area: 72mm
<7>C = ASB: Valid
<7>4 = BUSY: All
<8>F-C = H-Reduced Size: Invalid
<8>B-8 = V-Reduced Size: Invalid