

การตั้งค่า Thai Character สำหรับ mPOP

1. ดาวน์โหลด และติดตั้ง Star Quick Setup Utility จาก App Store หรือ Google Play.

Star Quick Setup Utility


STAR MICRONICS CO.,LTD.

5K+
Downloads


Everyone




2. เปิด Setting ในอุปกรณ์ของคุณ และเชื่อมต่อ mPOP ด้วย Bluetooth

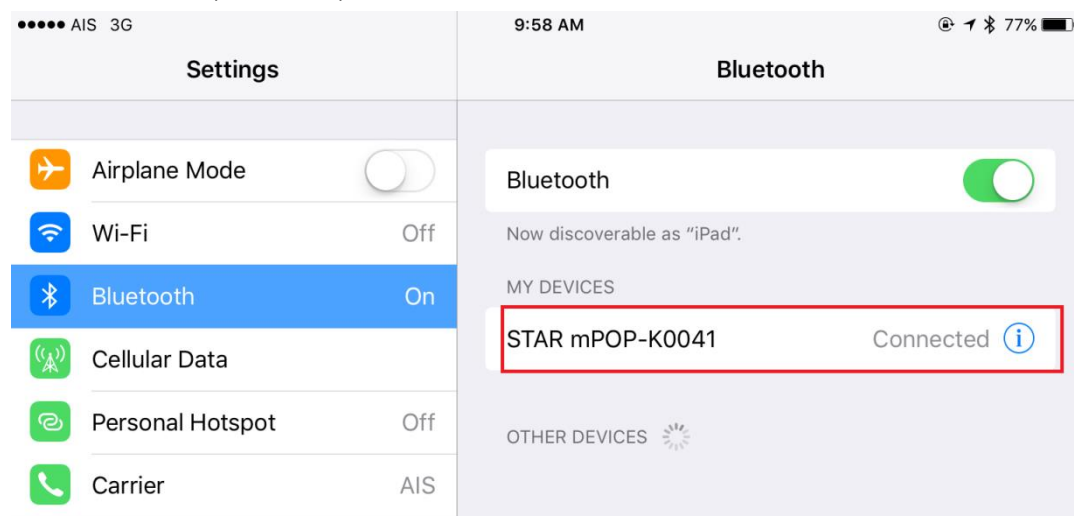


3. เปิดแอป Star Quick Setup Utility แล้วกด selected device หลังจากนั้นเลือกเครื่องพิมพ์ที่กำลังเชื่อมต่ออยู่

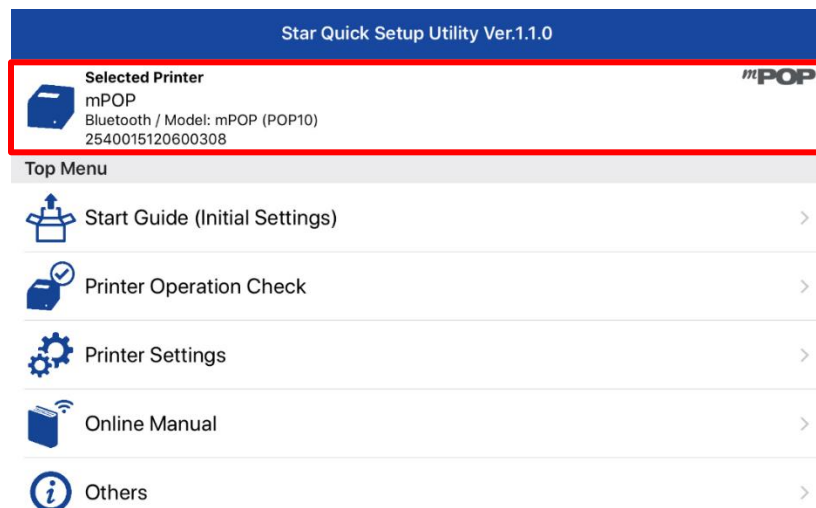


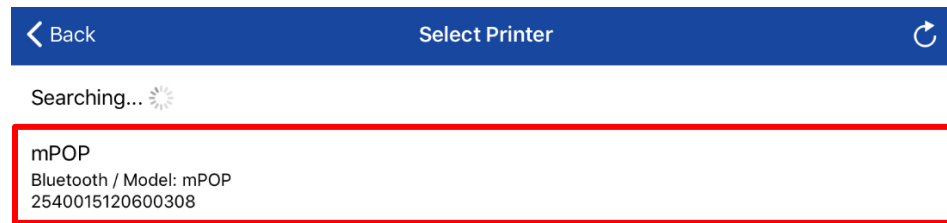

4. กด 'Printer Setting' > จากนั้นกด 'Memory Switch Setting'

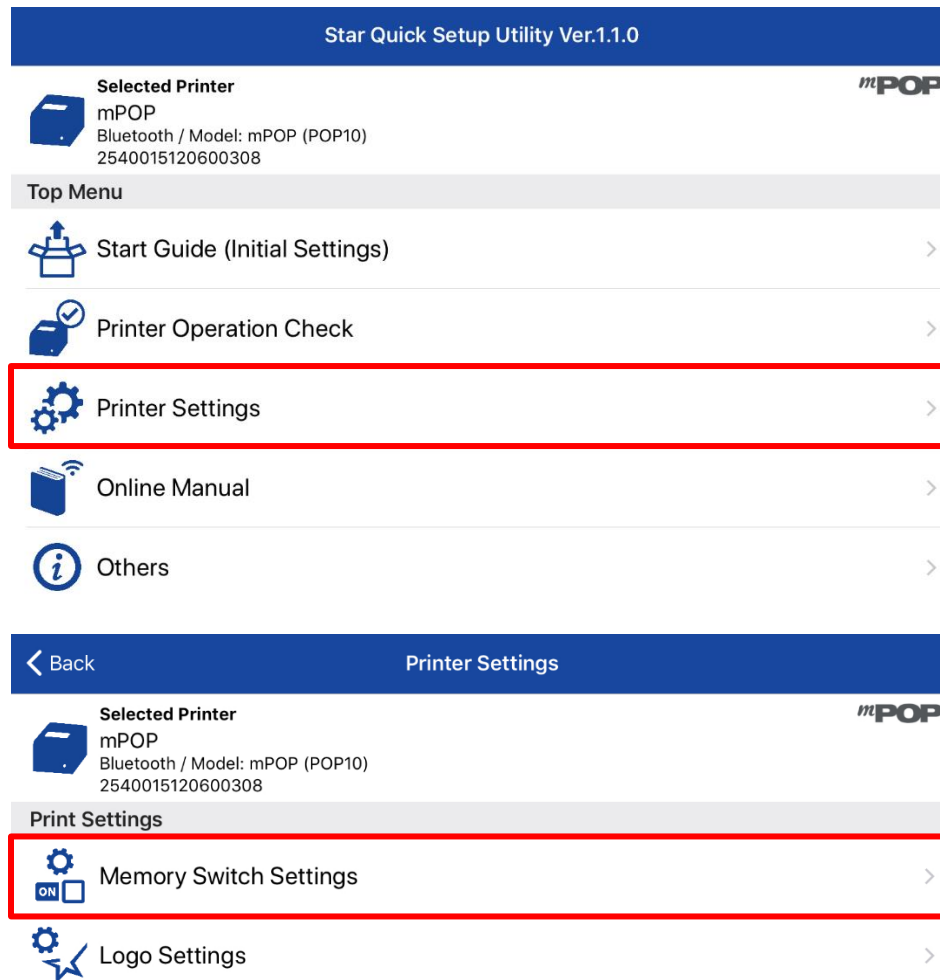

5. ตั้งค่า 'Special Region = Thai(1Pass)' และ 'Code Page = UTF-8' จากนั้นกด 'Apply' รอจนกว่าจะขึ้น Success.

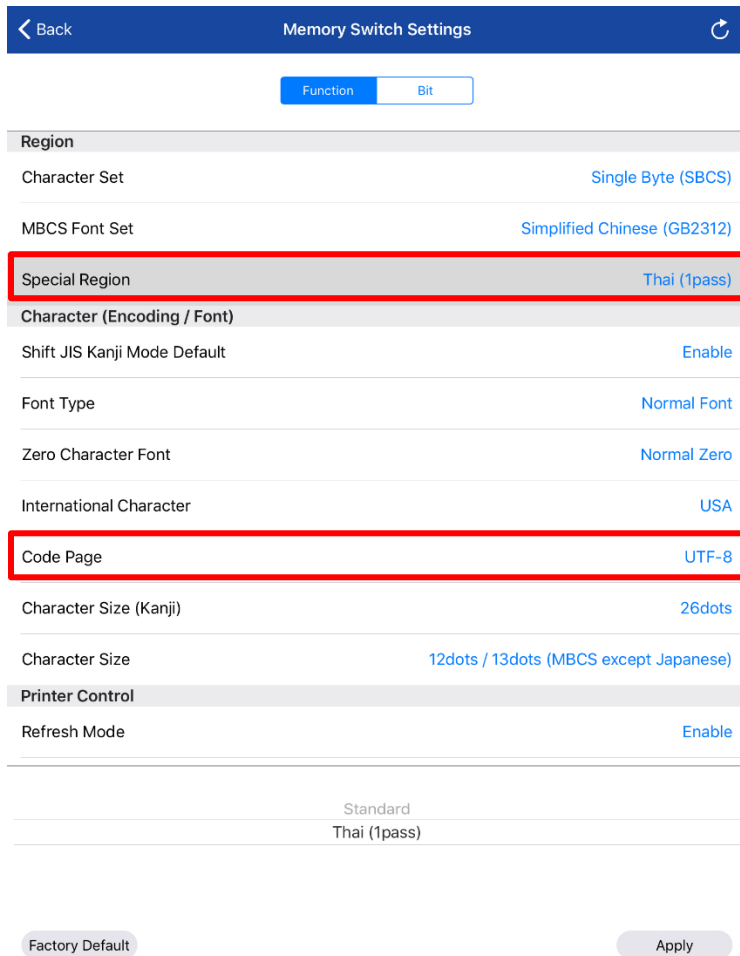

Memory Switch Settings

Function Bit

Region	
Character Set	Single Byte (SBCS)
MBCS Font Set	Simplified Chinese (GB2312)
Special Region	Thai (1pass)
Character (Encoding / Font)	
Shift JIS Kanji Mode Default	Enable
Font Type	Normal Font
Zero Character Font	Normal Zero
International Character	USA
Code Page	UTF-8
Character Size (Kanji)	26dots
Character Size	12dots / 13dots (MBCS except Japanese)
Printer Control	
Refresh Mode	Enable

Standard
Thai (1pass)

Factory Default Apply

