


# SK5-31



The SK5-31 features innovative anti-jam technology, user-friendly and easy maintenance, come with multiple connectivity options (USB/Serial or USB/LAN) and wide range adjustable paper guide to match with any solution

The SK5-31 printer sets a new standard in efficient, reliable, and professional-grade kiosk printing solutions.

## Build-in Presenter

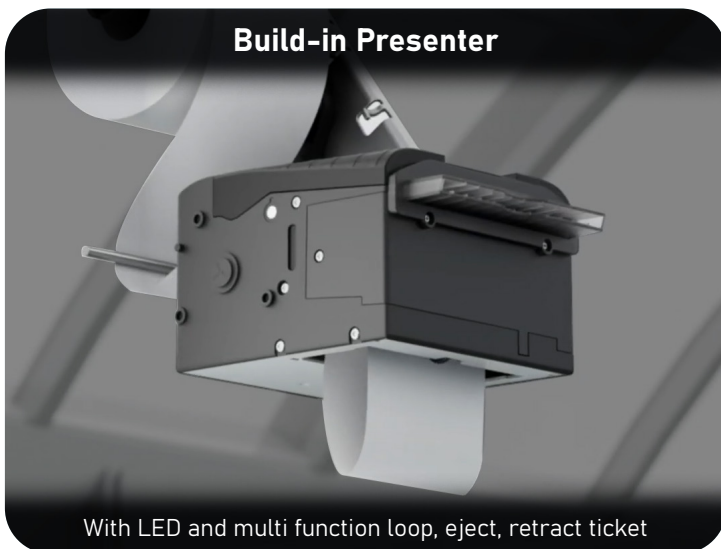

With LED and multi function loop, eject, retract ticket

## Auto Paper Loading Function




Easy paper loading by insert paper in printer




Scan or Click Here !!  
to Product Page

# SK5-31 Specifications

## 12 Adjustable Paper Holder Positions



## Anti-Paper Jam Function

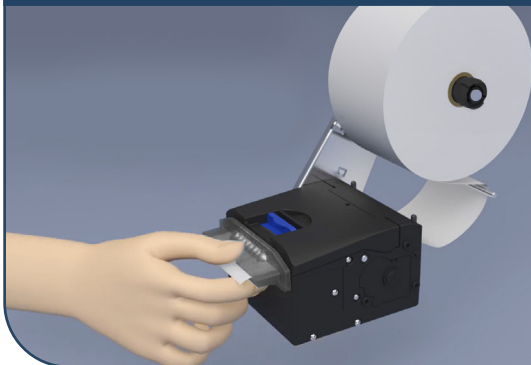

## Adjustable Paper Guide



<b>Printer Model</b>	SK5-31	
<b>Printer Method</b>	Direct Thermal Line Printing	
<b>Emulation</b>	StarPRNT & ESC/POS	
<b>Print Speed</b>	Max. 250 mm/second	
<b>Resolution</b>	203 dpi (8 dot/mm)	
<b>Print Width</b>	Max 80 mm	
<b>Paper Specifications</b>	Type	Thermal Paper Roll
	Paper Width	54 - 82.5 mm
	Roll Diameter	Max. Ø 150 mm
	Thickness	59 ~ 150 µm
<b>Auto-Cutter</b>	Full cut	
<b>Presenter</b>	Clamp (bottom loop only) / Retract / Continuous mode Ejecting speed : 600mm / sec Ticket length : 60 to 250 mm	
<b>Sensor</b>	Near end Sensor/ Paper end Sensor/ BM (Black mark) Sensor / Presenter Sensor	
<b>Connectivity</b>	<b>SK5-31UD</b>	<b>SK5-31UE</b>
	Serial	LAN (10Base-T/100Base-T)
	USB 2.0	USB 2.0
<b>Power Supply</b>	DC Power supply DC 24V ± 5% / TYP 2.7A	
<b>Dimensions</b>	116 x 143.5 x 76.4 mm (W x D x H) exclude paper roll	
<b>Weight</b>	Approx 910g (Without paper roll, LED Bezel, Paper Holder)	
<b>Barcode Supported</b>	1D : UPC-A/E, JAN13/8, CODE39, ITF, CODABAR, CODE128, GS1 Databar Omni-directional, Truncated, Limited, Stacked, Stacked Omni-directional	
	2D : QR, MicroQR, MaxiCode, MicroPDF417, PDF417, DataMatrix	
<b>Driver and SDK</b>	Windows Driver / Linux CUPS / Windows SDK / Unix SDK / Android SDK / iOS StarXpand SDK	
<b>Regulation</b>	VCCI, FCC, CE CLASS A, UL	
<b>Reliability</b>	Pulse activation 200 million pulses or more Abrasion resistance 150 km or more Cutting life 2 million cuts or more (Thickness 75um (60 g/m2) or less)	



Scan or Click Here !!  
to Support Site