





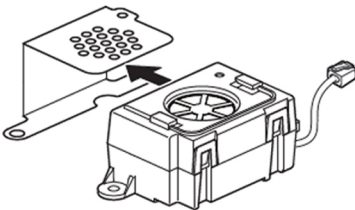


Check Accessories


All Accessories / Type of Printer						
mC-Print 3	No Used	Used	Used	No Used	No Used	No Used
SP700	No Used	Used	No Used	Used	No Used	No Used
TSP100 / II / III	Used	Used	Used	Only 1 Required	No Used	No Use except for TSP100GT Use with TSP100GT
TSP650II	Used	Used	Used	Only 1 Required	No Used	No Used
TSP700II	No Used	Used	No Used	No Used	Used	No Used

● Install Buzzer into Star mC-Print 3 Model


1. Remove Ground Fitting from the Buzzer by sliding out, See (Pic.1)
2. Remove Upper Case and 2 screws then remove Buzzer from the Lower Case, See (Pic.2)
3. Remove Rear Cover behind the printer mC-Print 3, See (Pic.3)
4. Install Buzzer at behind the printer mC-Print 3 and install screw(M2.6), See (Pic.4)
5. Plug the RJ11 Cable to DK-Port and Install Rear Cover behind the printer, See (Pic.5)




(Pic.1)

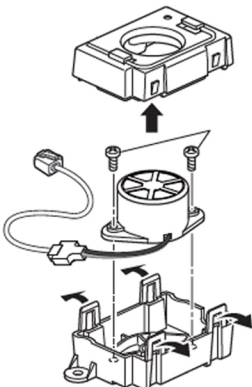


(Pic.2)

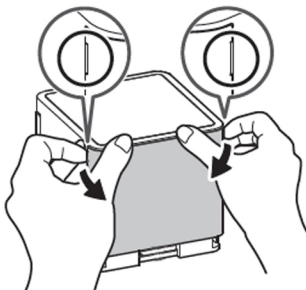

(Pic.3)

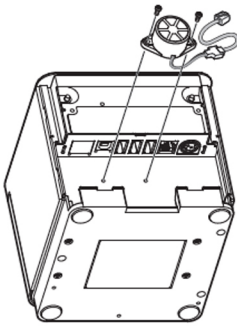


(Pic.4)

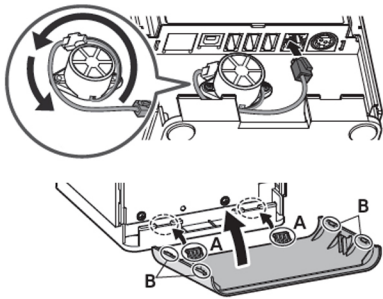

(Pic.5)

● Install Buzzer into Star SP700 Model


1. Install Buzzer and screw(M3) under the printer unit then plug the RJ11 Cable to DK-Port, See (Pic.1)

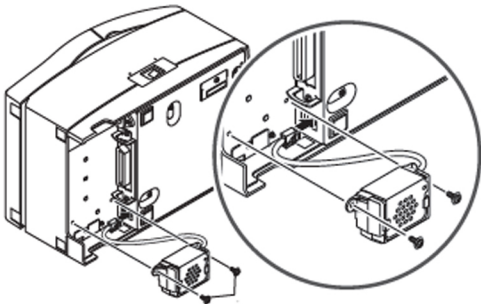


(Pic.1)

● Install Buzzer into Star TSP100/ II / III / TSP650II


1. Remove Ground Fitting from the Buzzer by sliding out, See (Pic.1)
2. Remove Upper Case and 2 screws for pull the Buzzer out from case, See (Pic.2)
3. Install 2 screws into Bracket, See (Pic.3)
4. Manage cable into Bracket, See (Pic.4)
5. Install Bracket and screw(M3) under the printer then plug the RJ11 Cable to DK-Port, See (Pic.5)

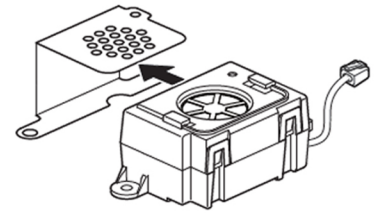


(Pic.1)

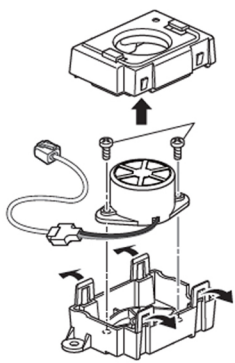



(Pic.2)

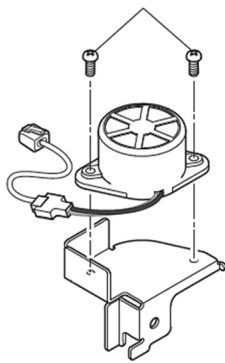

(Pic.3)

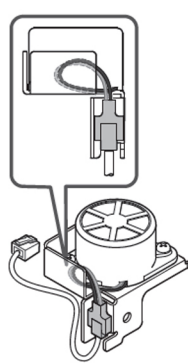


(Pic.4)

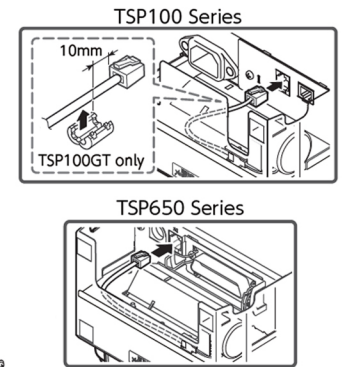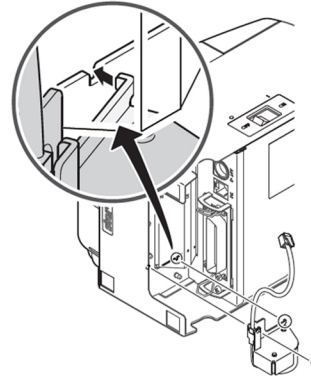


(Pic.5)

● Install Buzzer into Star TSP700II


1. Remove Ground Fitting from the Buzzer by sliding out, See (Pic.1)
2. Remove Upper Case and 2 screws for pull the Buzzer out from case, See (Pic.2)
3. Install Buzzer to Cable Cover and install 2 screws(M2.6), See (Pic.3)
4. Plug the RJ11 Cable to DK-Port, See Pic.4)

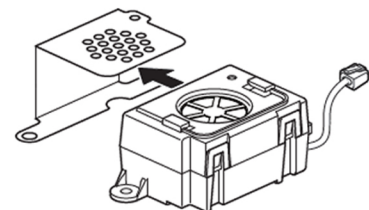


(Pic.1)

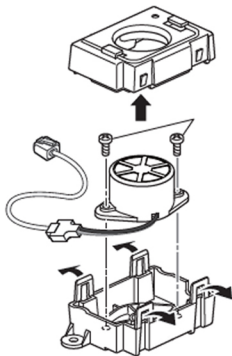

(Pic.2)

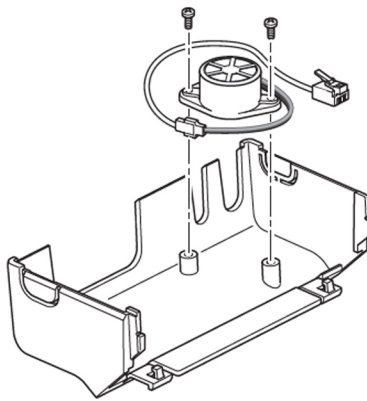


(Pic.3)

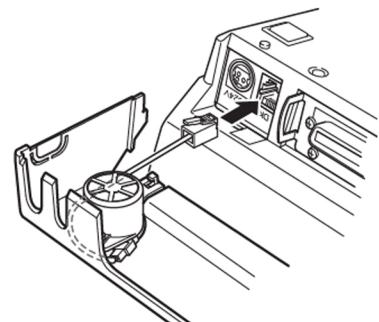


(Pic.4)

5. Install Cable Cover to behind the printer, See (Pic.5)
6. Install Blind Plate to Cable Cover, See (Pic.6)

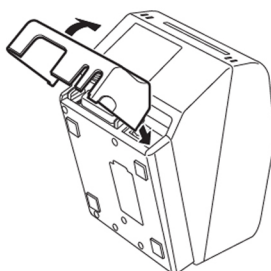

(Pic.5)

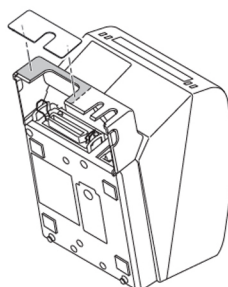

(Pic.6)

