

How to update firmware mPOP by Star Quick Setup Utility Application

****Download and Install Star Quick Setup Utility from App Store or Google Play****

Star Quick Setup Utility

STAR MICRONICS CO.,LTD.

5K+
Downloads


E
Everyone



1. Turn on printer mPOP
2. Go to Setting > Open Bluetooth and connecting to printer mPOP



3. Open [Star Quick Setup Utility](#) Application, Then click Selected Device and choose connected mPOP

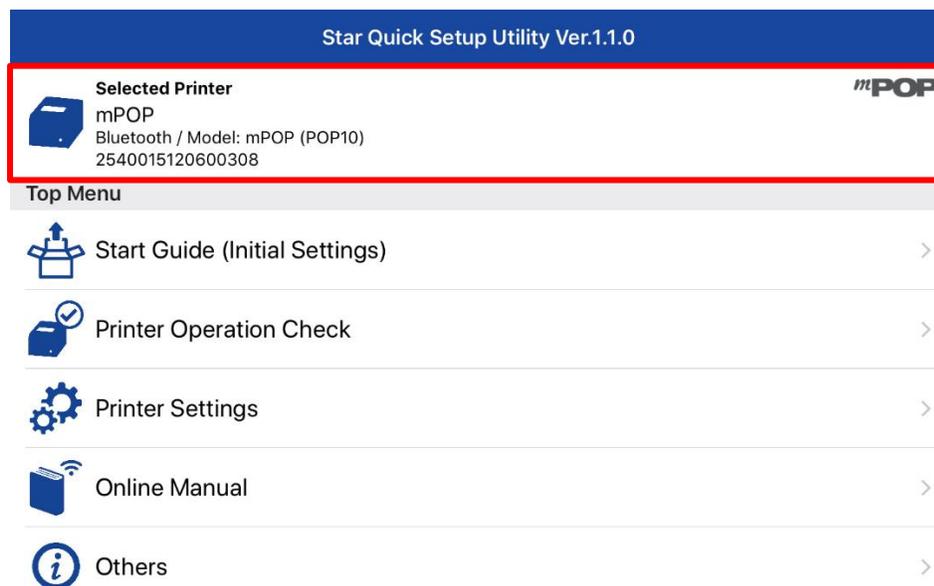

← Back Select Printer ↻

Searching... 🌀

mPOP
Bluetooth / Model: mPOP
2540015120600308

4. Click 'Printer Setting' slide down and click 'Firmware Updates'

Star Quick Setup Utility Ver.1.1.0

Selected Printer **mPOP**

 mPOP
Bluetooth / Model: mPOP (POP10)
2540015120600308

Top Menu

-  Start Guide (Initial Settings) >
-  Printer Operation Check >
-  **Printer Settings** >
-  Online Manual >
-  Others >


Selected Printer **mPOP**

 mPOP
Bluetooth / Model: mPOP (POP10)
2540015120600308


Others

-  Printer Self Printing >
-  **Firmware Update** >
-  Customer Service Function >

5. Click 'Update'

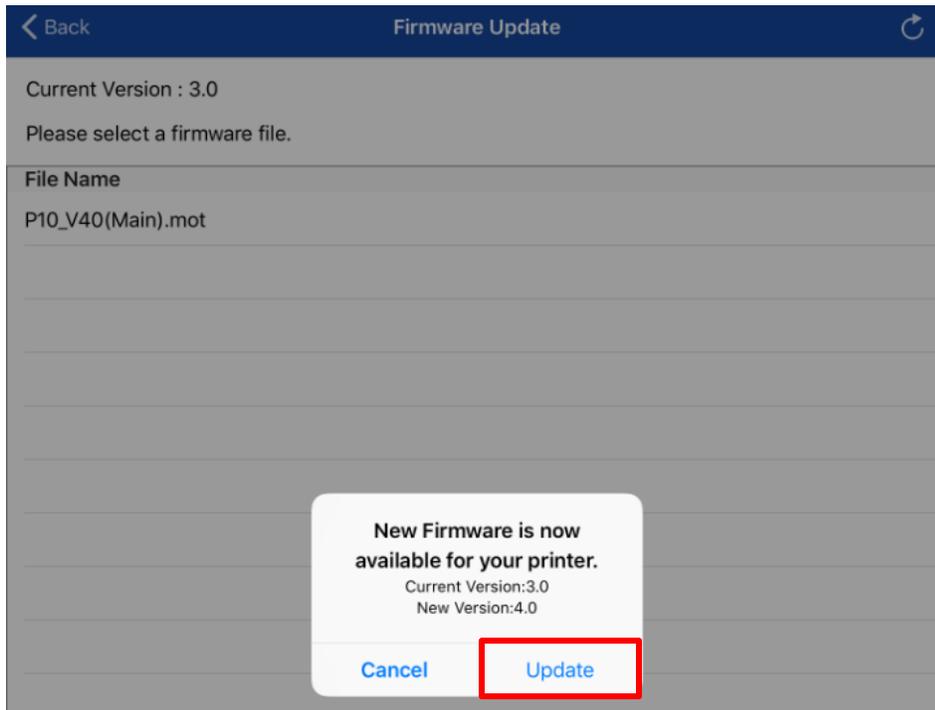

6. After start updating process and LED on the printer will blinking. Wait till success shows up

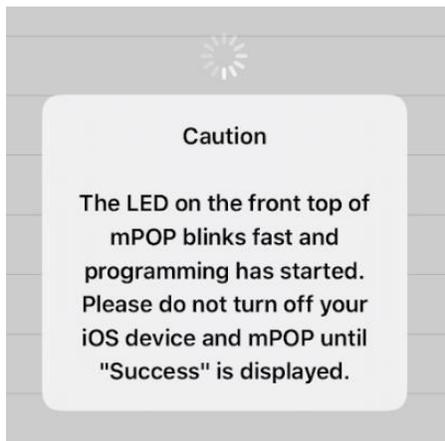

7. Click OK to Finished



8. Check firmware version from Self-Test by turn printer off press paper holder then press and hold Red button then turn printer on and then printer will be printing Self-Test

