

How to set Ad –Hoc and Infrastructure TSP100IIIW

Ad – Hoc

Default TSP100IIIW is Ad –Hoc. So reset printer will status ad-Hoc.

1. Turn off printer
2. Hold button RST (Located at the rear of the unit) and Turn on printer around 5 sec.


Infrastructure

1. Printer is status Ac – Hoc before change to infrastructure for setting use iOS or Window setting




2. Connect printer with ad – hoc and put IP in browser .

iOS

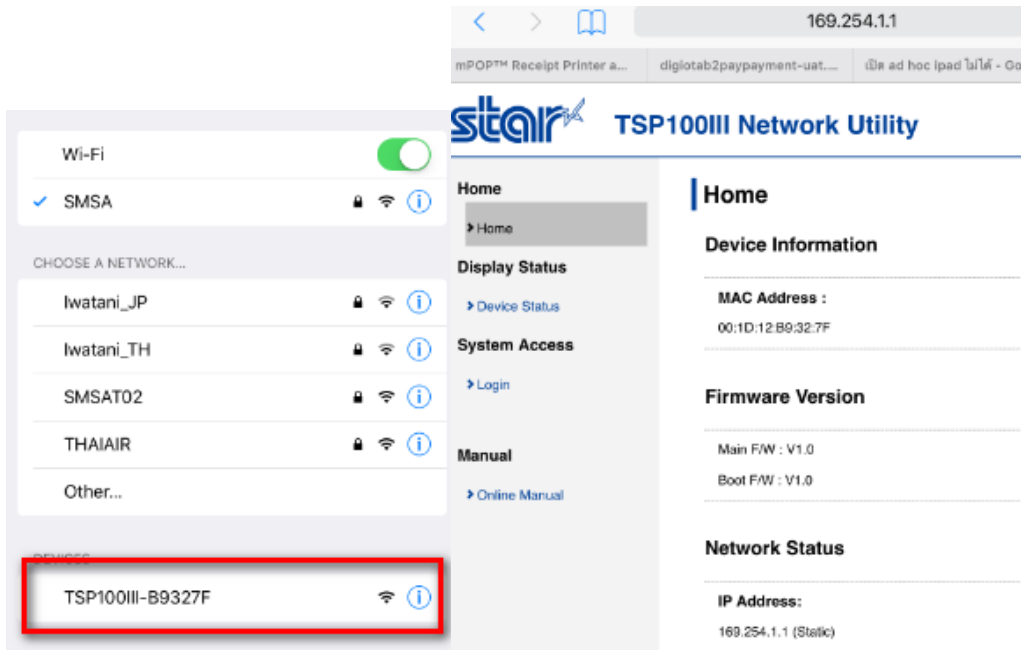

Windows

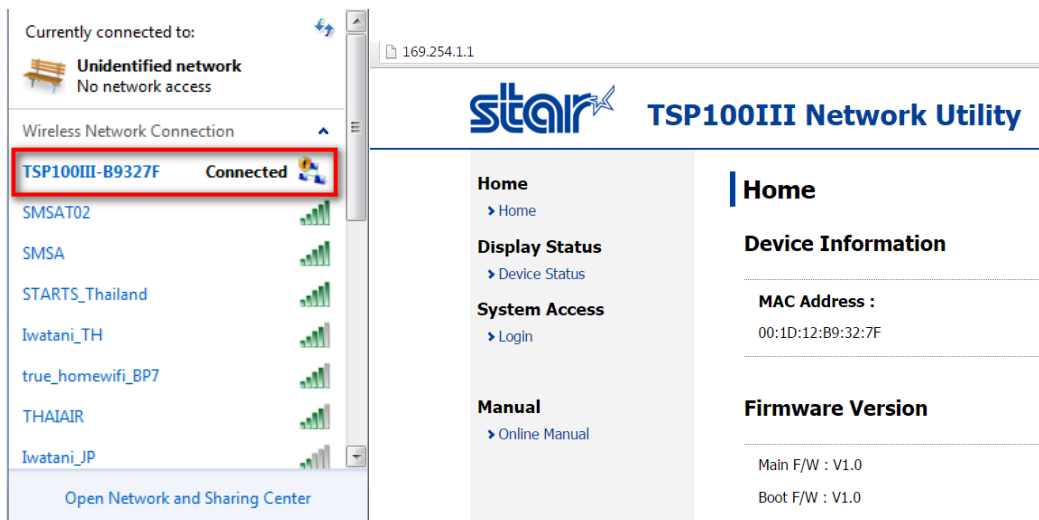

3. Click WLAN Setting and put SSID(name router),Security router,Key(password) then click “Submit” button and save

Home
▶ Home

Network Configuration
▶ WLAN Settings
▶ IP Parameters
▶ System Configuration
▶ Change Password
▶ Save
▶ Set Default

Display Status
▶ Device Status

System Access
▶ Logout

Manual

Wireless LAN Settings

SSID

Security
WPA2/AES

Security Key

Show characters

Submit Cancel

4. Click “Execute” and wait printer reset

Home
▶ Home

Network Configuration
▶ WLAN Settings
▶ IP Parameters
▶ System Configuration
▶ Change Password
▶ Save
▶ Set Default

Save

Save → Configuration printing → Restart device

Save → Restart device

Execute Cancel

5. Self – test check status