

Technical Training TSP143IIIW





Ad - Hoc

สำหรับ Ad – Hoc จะถูกตั้งค่าเป็น default ในการเริ่มต้น




Infrastructure

มีการ set ด้วยกัน 2 วิธี
วิธีแรก ใช้ iOS หรือ window ในการ setting

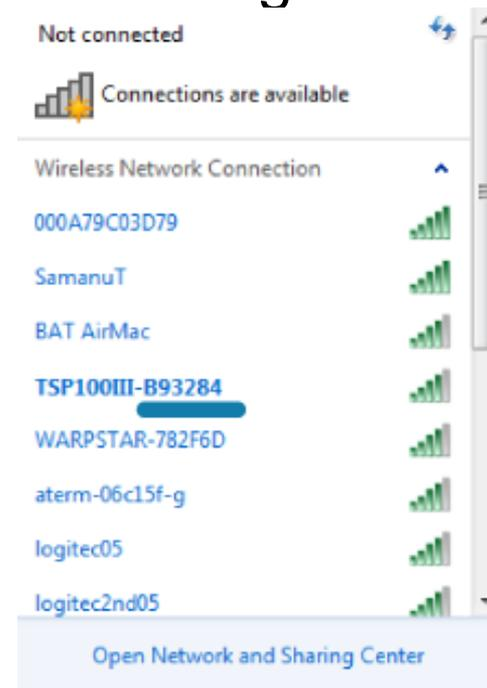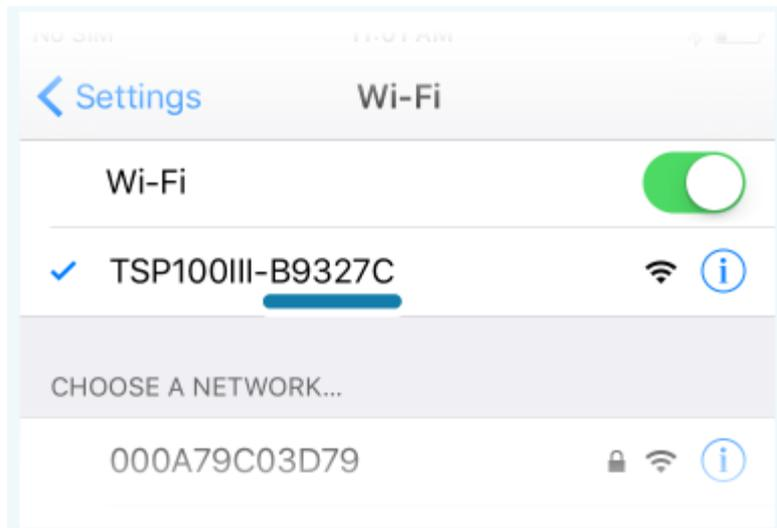


Infrastructure

วิธีแรกเข้า browser ตามเพื่อ set SSID และ Password

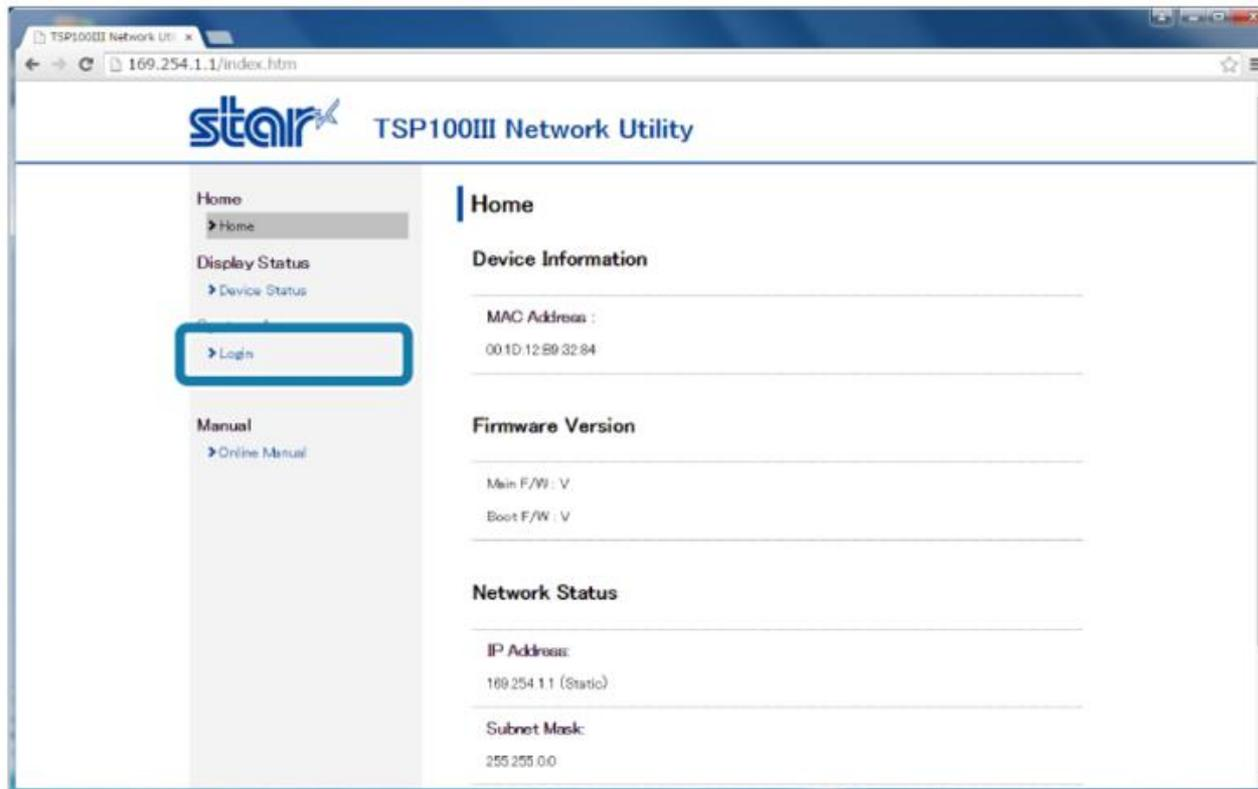

Infrastructure

User : root
Pass: public

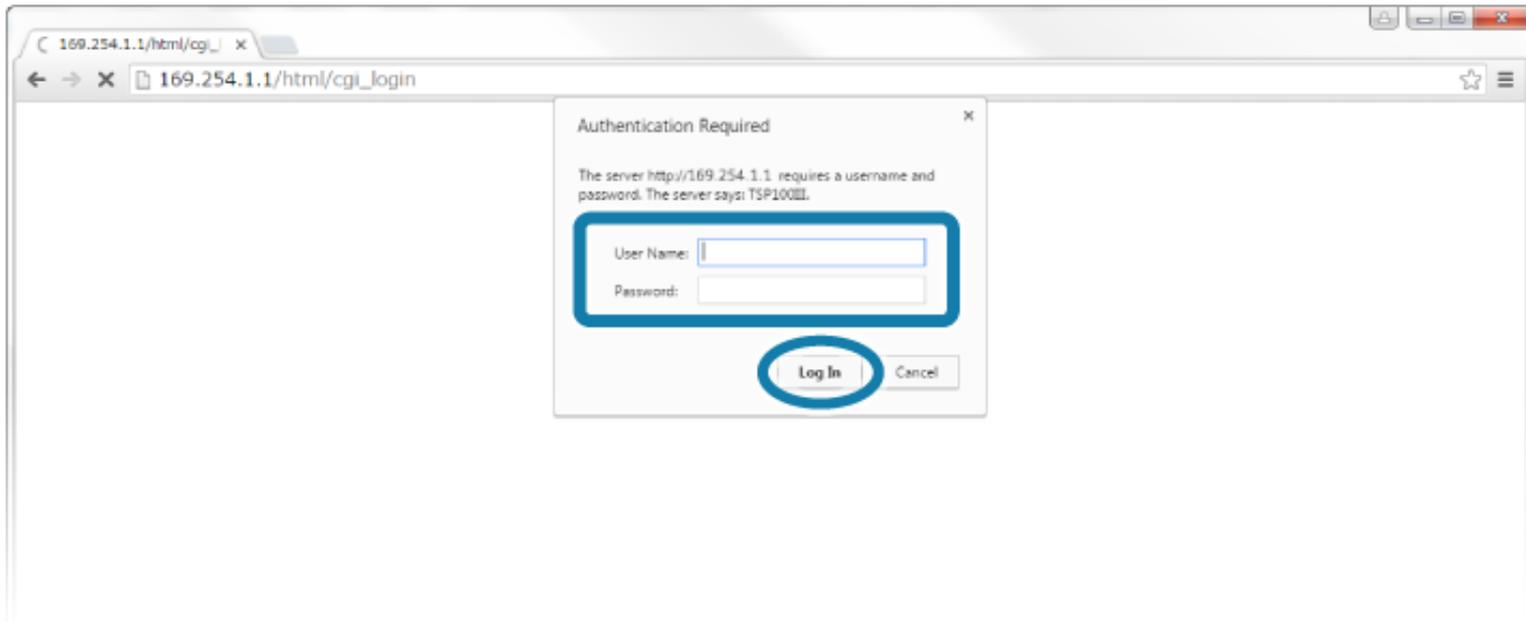


Infrastructure

Set ค่าเพื่อเชื่อมต่อกับ router

SSID = ชื่อของ router


Security = ค่าที่ความปลอดภัยของ router ที่ได้ตั้งไว้

Security Key = รหัสของ router

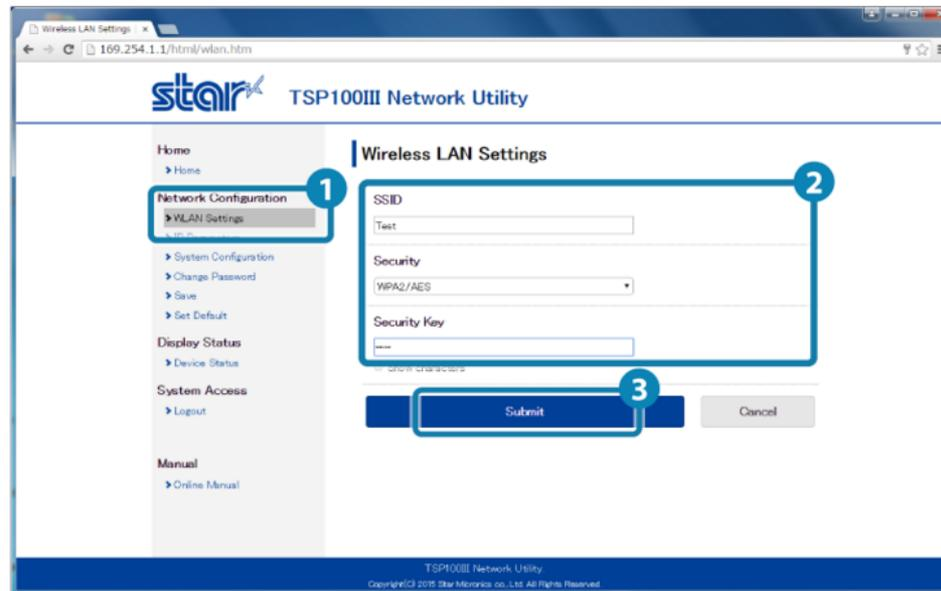


Infrastructure

กด save

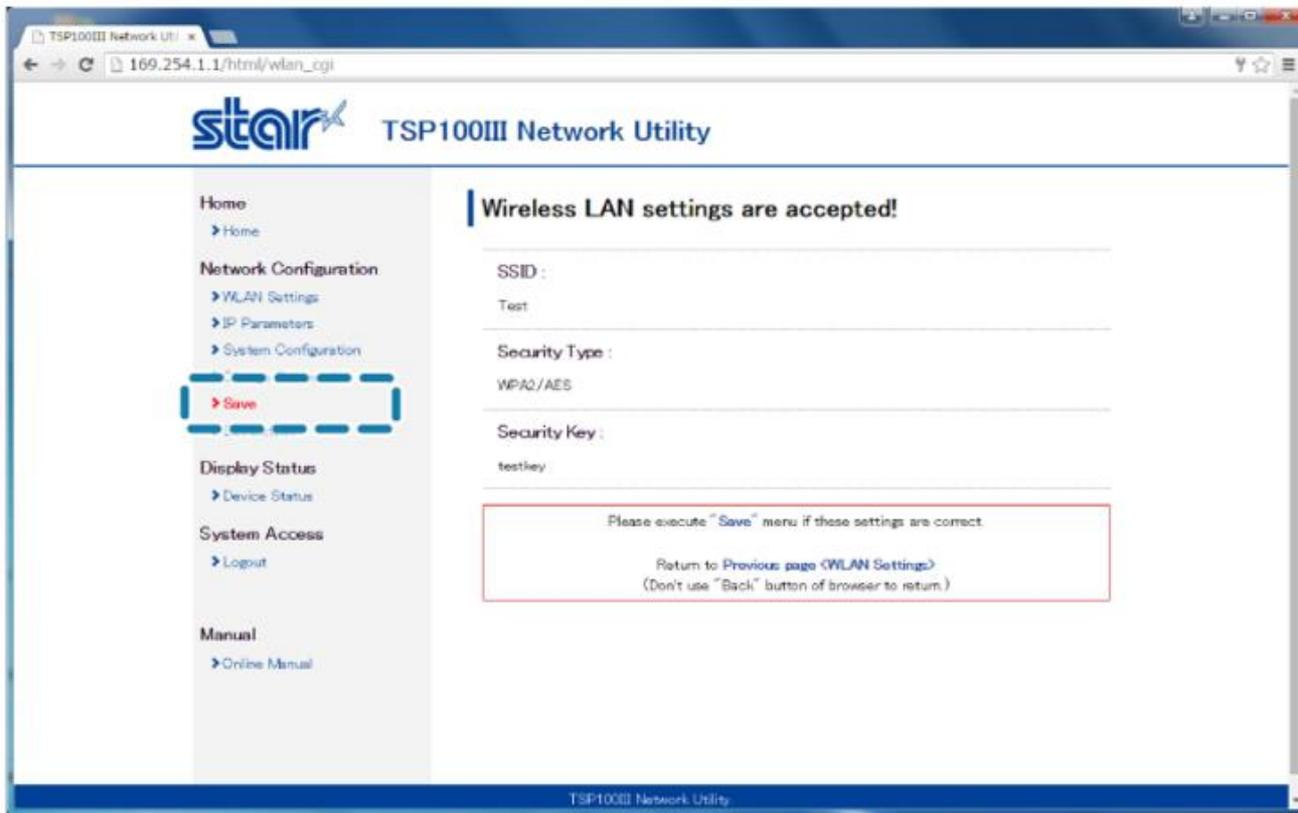


Infrastructure

กด Save -> Configuration -> Printing Restart device
กด Execute

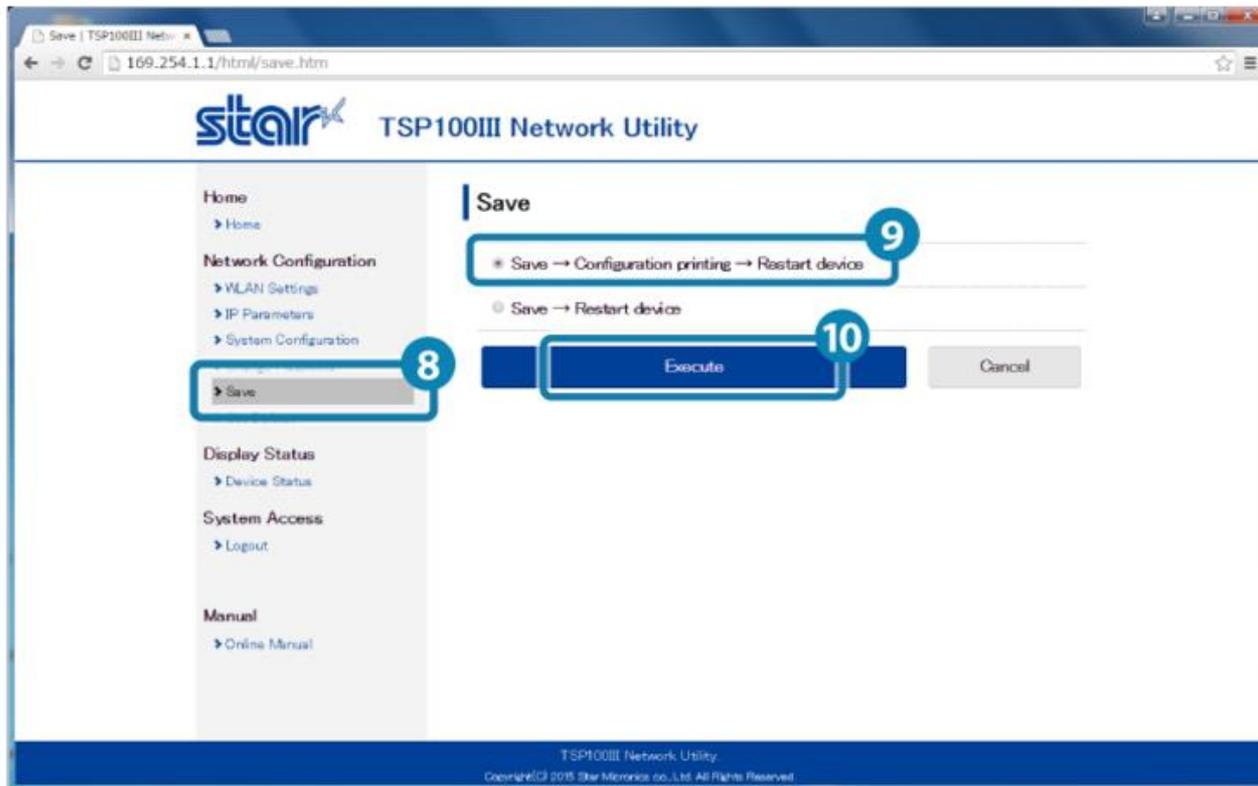

Infrastructure

วิธีที่สอง set ผ่าน WPS กับ router กดปุ่ม “Pair” จนไฟ status กระพริบ

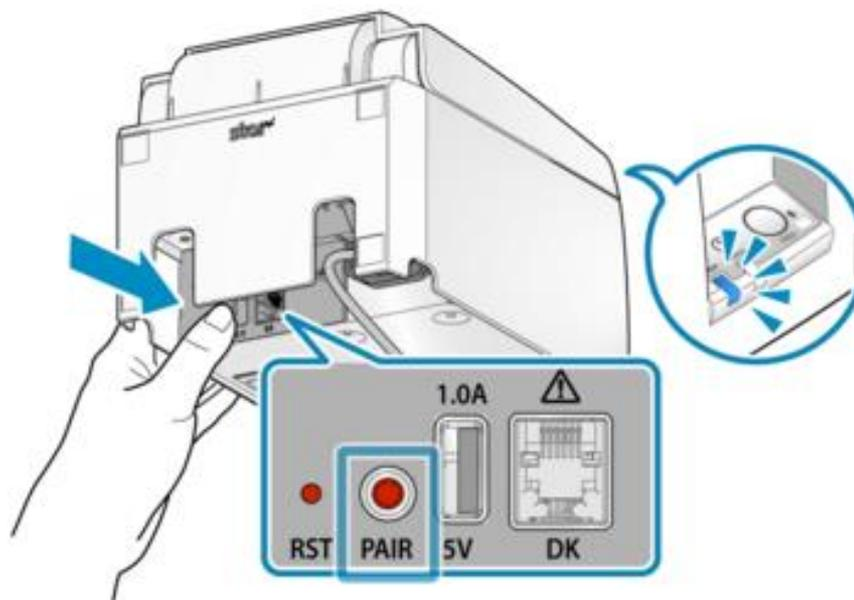


Infrastructure

กดปุ่ม “WPS” ที่ router เพื่อทำการเชื่อมต่อ




Infrastructure

เมื่อไฟปริ้นเตอร์นี้ และ ปริ้นเตอร์ปริ้น status แสดงว่าเชื่อมต่อสำเร็จ

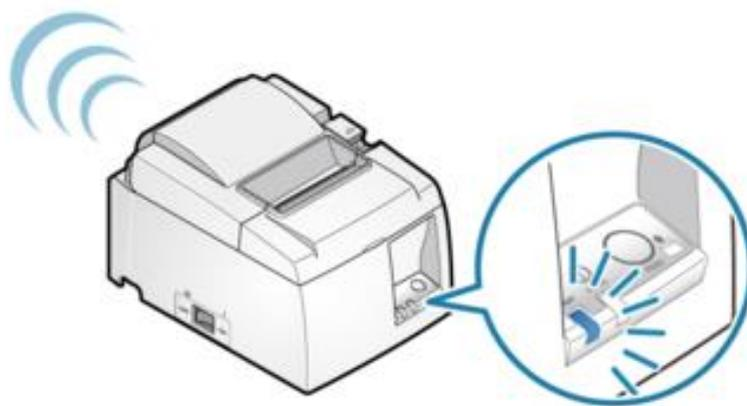

Reset Printer

สำหรับการ reset printer โดยกดปุ่ม RST ค้างแล้วเปิดเครื่อง รอฟังเสียง จะหัวปรีนเตอร์ reset

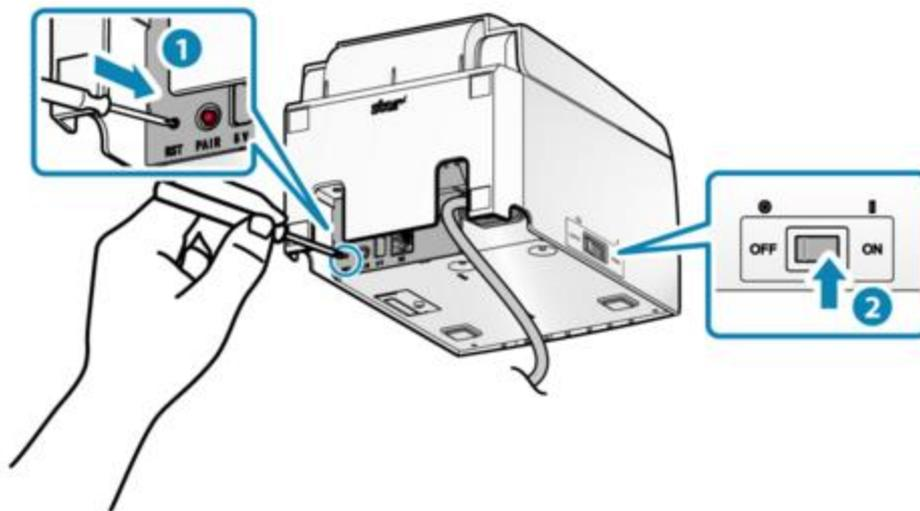

Clone Serial Number

iOS / Android

Windows

Clone Serial Number Settings
✕

What is the Clone Serial Number ?

Product

Clone

Clone Serial Number : Alphanumeric characters. (1 to 16 digits)

**In case of blank, it will use product serial number.*

Apply
Close

← Clone Serial Number Settings
↻

Product

Clone

Apply

Clone Serial Number : Alphanumeric characters. (1 to 16 digits.)

The clone serial number is designed to make the printer identifiable to the original serial number even when, for example in a repairing, it is replaced with another unit with a different product serial number.

***In case of blank, it will use product serial number.**

Installation
 Sample
 Setting
 Help

Clone MAC Address

Telnet : Set Clone MAC Address

```

ca: Telnet 192.168.10.103
Welcome to TSP100III TELNET Utility.
Copyright(C) 2015 Star Micronics co., Ltd.
<< Connected Device >>
Device Model : TSP143IIIW <STR_T-001>
MAC Address : 00:1D:12:B9:32:87

login: root
password: *****

Hello root

=== Main Menu ===
1) IP Parameters Configuration
2) System Configuration
3) Change Password
5) Wireless Lan Settings
95) Miscellaneous
96) Display Status
97) Reset Settings to Defaults
98) Save & Restart
99) Quit

Enter Selection: 95

=== Miscellaneous Menu ===
2) Clone MAC Address : [Invalid]
99) Back to Main Menu

Enter Selection: 2

Enter Clone MAC Address(XX:XX:XX:XX:XX:XX) :00:1D:12:B9:32:99
OK> Clone MAC Address <00:1D:12:B9:32:99> is accepted.

=== Miscellaneous Menu ===
2) Clone MAC Address : 00:1D:12:B9:32:99
99) Back to Main Menu

Enter Selection: _
  
```

Telnet : Confirmation & Reset

```

ca: Telnet 192.168.10.122
Welcome to TSP100III TELNET Utility.
Copyright(C) 2015 Star Micronics co., Ltd.
<< Connected Device >>
Device Model : TSP143IIIW <STR_T-001>
MAC Address : 00:1D:12:B9:32:87
MAC Address : 00:1D:12:B9:32:99 <Clone>

login: root
password: *****

Hello root

=== Main Menu ===
1) IP Parameters Configuration
2) System Configuration
3) Change Password
5) Wireless Lan Settings
95) Miscellaneous
96) Display Status
97) Reset Settings to Defaults
98) Save & Restart
99) Quit

Enter Selection: 95

=== Miscellaneous Menu ===
2) Clone MAC Address : 00:1D:12:B9:32:99
99) Back to Main Menu

Enter Selection: 2


Do you wish to delete Clone MAC Address? [Y/N] y
OK> Clone MAC Address is deleted.

=== Miscellaneous Menu ===
2) Clone MAC Address : [Invalid]
99) Back to Main Menu


Enter Selection: _
  
```

Clone MAC Address

สำหรับการเปิดใช้งาน telnet ใน window

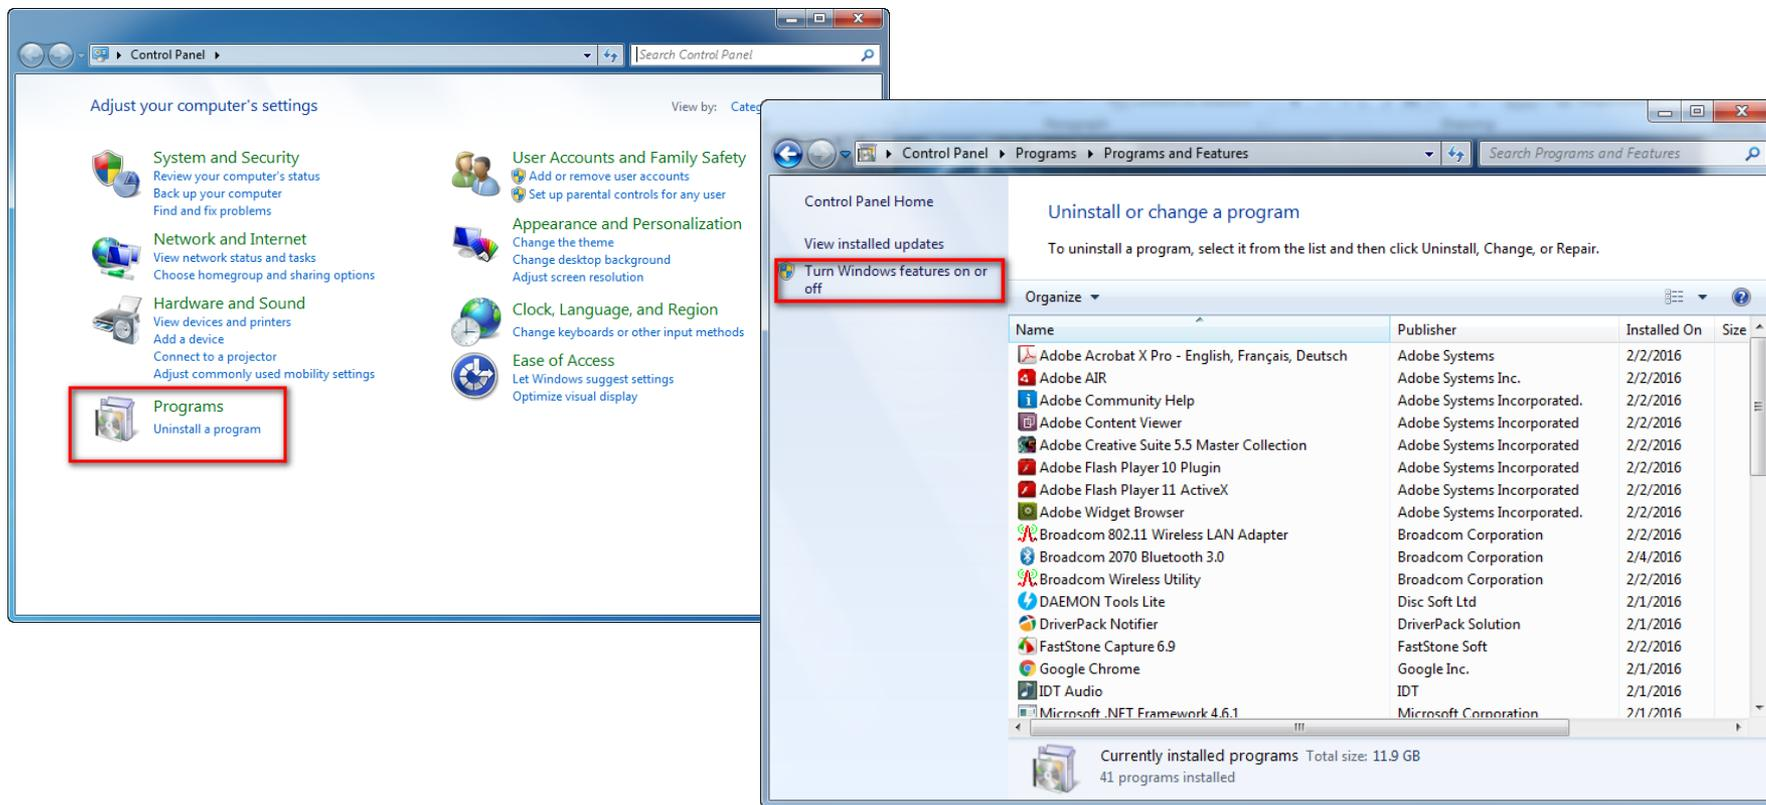

Clone MAC Address

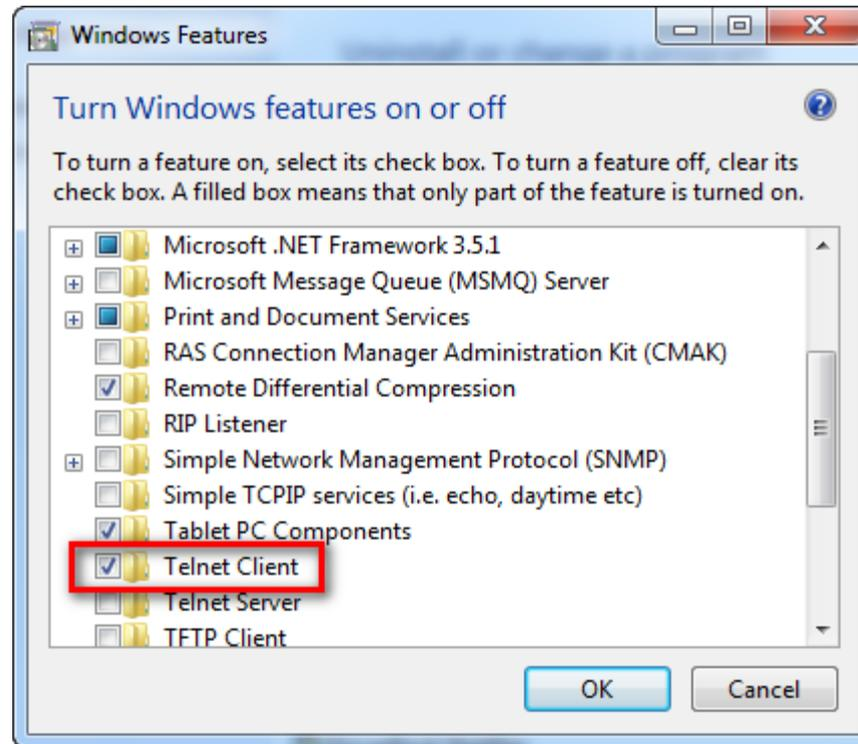

Clone MAC Address

เข้าไปที่ cmd.exe พิมพ์ telnet และ IP ปรี้นเตอร์ เช่น telnet 164.254.1.1

```

Telnet 192.168.10.103
Welcome to TSP100III TELNET Utility.
Copyright(C) 2015 Star Micronics co., Ltd.

<< Connected Device >>
Device Model : TSP143IIIW <STR_T-001>
MAC Address : 00:1D:12:B9:32:87

login: root
password: *****

Hello root

=== Main Menu ===
 1) IP Parameters Configuration
 2) System Configuration
 3) Change Password
 5) Wireless Lan Settings
95) Miscellaneous
96) Display Status
97) Reset Settings to Defaults
98) Save & Restart
99) Quit

Enter Selection: 95

=== Miscellaneous Menu ===
 2) Clone MAC Address : [Invalid]
99) Back to Main Menu

Enter Selection: 2

Enter Clone MAC Address (xx:xx:xx:xx:xx:xx) :00:1D:12:B9:32:99

OK> Clone MAC Address <00:1D:12:B9:32:99> is accepted.

=== Miscellaneous Menu ===
 2) Clone MAC Address : 00:1D:12:B9:32:99
99) Back to Main Menu

Enter Selection: _
  
```

Thank you