



วิธีตั้งค่าเครื่องพิมพ์ Star รุ่น BSC10 / TSP100III LAN / TSP650IIE ให้รองรับ Multi Session

* คู่มือฉบับนี้ใช้ได้กับเครื่องพิมพ์ที่ใช้การเชื่อมต่อแบบ LAN (อินเทอร์เน็ต) เท่านั้น


1. เชื่อมต่อสาย LAN เข้ากับเครื่องพิมพ์ และ ทำการ Self-Test เพื่อตรวจสอบ IP Address ของเครื่องพิมพ์
 - a. ปิดเครื่องพิมพ์
 - b. กดปุ่ม 'FEED' ค้างไว้ พร้อมกับเปิดเครื่องพิมพ์ในเวลาเดียวกัน
 - c. กดปุ่ม 'FEED' ค้างไว้ จนเครื่องพิมพ์ทำการพิมพ์ใบ Self-Test ออกมา
2. เปิด Browser แล้วใส่ IP Address ของเครื่องพิมพ์ในช่อง URL จากนั้น คลิก 'Login'

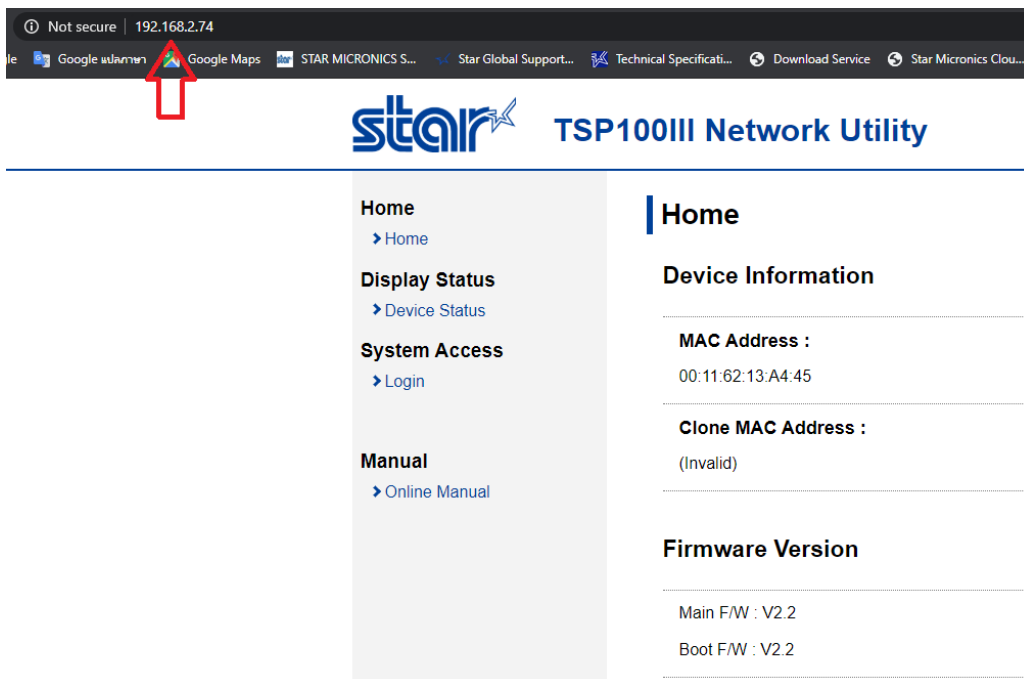

3. ใส่ Username: **root** // Password: **public**

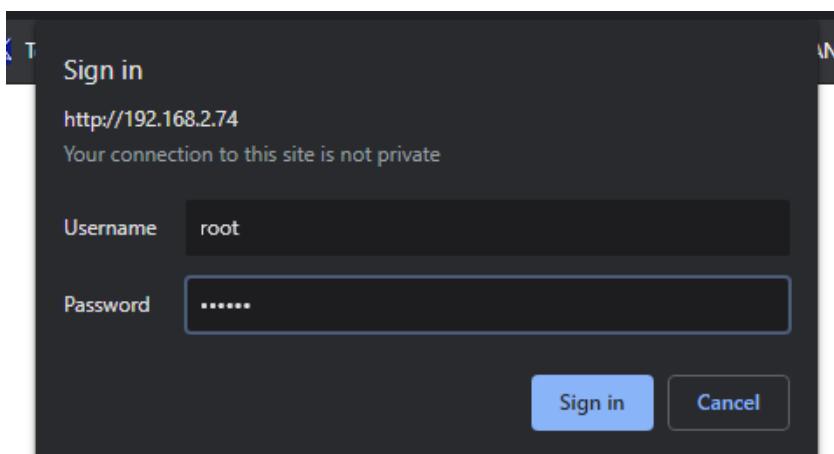


4. คลิก 'System Configuration'

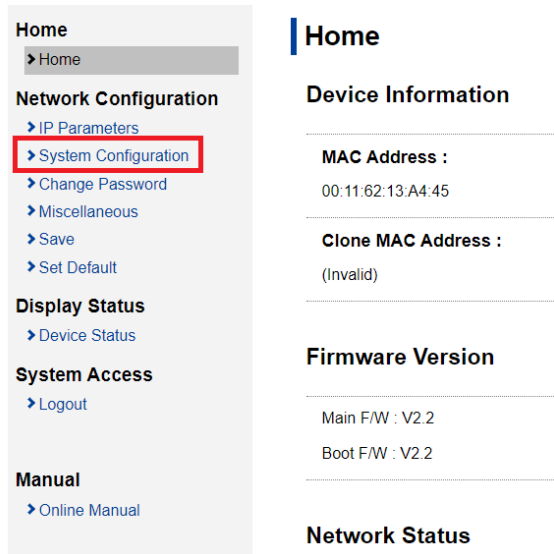


The screenshot shows the 'Home' page of the web interface. The left sidebar contains a menu with the following items: Home, Network Configuration (with sub-items: IP Parameters, System Configuration, Change Password, Miscellaneous, Save, Set Default), Display Status (with sub-item: Device Status), System Access (with sub-item: Logout), and Manual (with sub-item: Online Manual). The 'System Configuration' link is highlighted with a red box.

5. ในหัวข้อ #9100 Multi Session เปลี่ยนเป็น 'ENABLE' จากนั้น คลิก 'Submit'

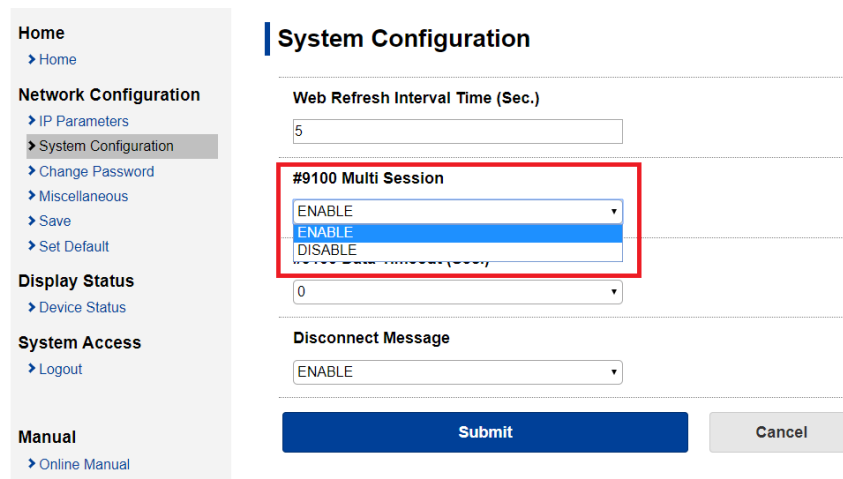


The screenshot shows the 'System Configuration' page. The left sidebar is the same as in the previous screenshot, but 'System Configuration' is now selected. The main content area shows the following settings: Web Refresh Interval Time (Sec.) is 5; #9100 Multi Session is a dropdown menu with 'ENABLE' selected (highlighted with a red box); Disconnect Message is ENABLE. At the bottom, there are 'Submit' and 'Cancel' buttons.

6. คลิก 'Save'

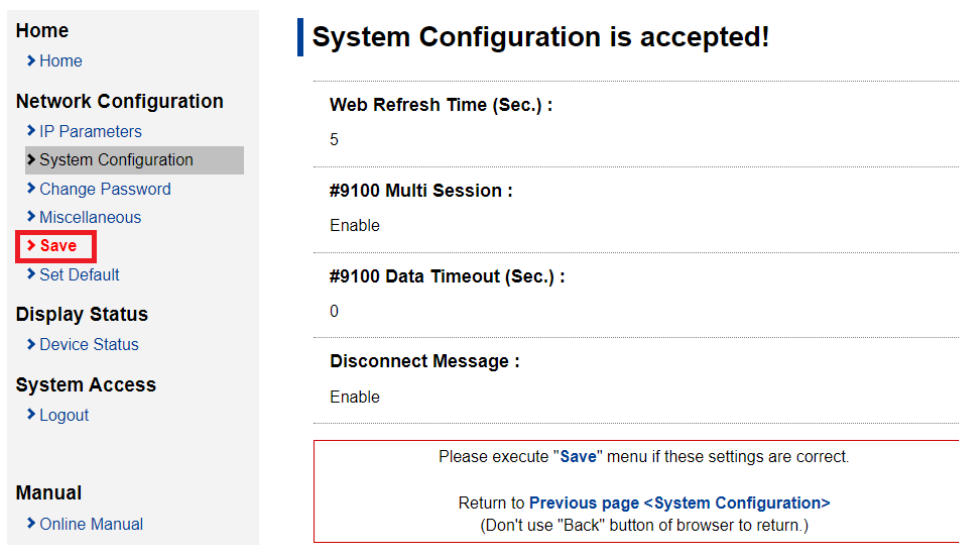

The screenshot shows the 'System Configuration' page after a successful save. The left sidebar is the same as in the previous screenshot, but 'Save' is now selected. The main content area shows the following settings: Web Refresh Time (Sec.) : 5; #9100 Multi Session : Enable; #9100 Data Timeout (Sec.) : 0; Disconnect Message : Enable. A red box highlights a message at the bottom: 'Please execute "Save" menu if these settings are correct. Return to Previous page <System Configuration> (Don't use "Back" button of browser to return.)'

7. เลือก 'Save > Configuration Printing > Restart Device' จากนั้น คลิก 'Execute'

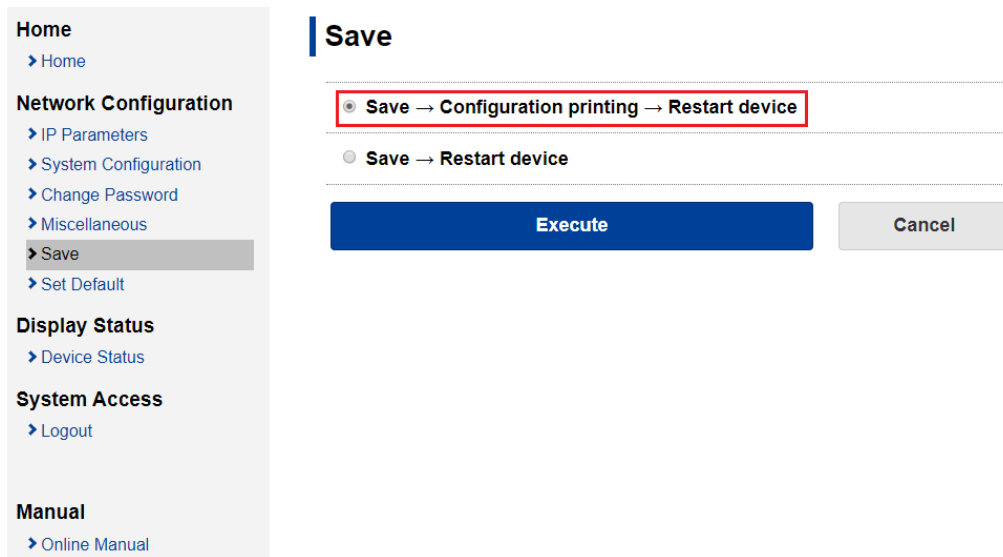

The screenshot shows a web interface with a left sidebar menu and a main content area. The sidebar menu includes sections for Home, Network Configuration, Display Status, System Access, and Manual. The 'Save' option under Network Configuration is highlighted. The main content area is titled 'Save' and contains two radio button options: 'Save -> Configuration printing -> Restart device' (which is selected and highlighted with a red box) and 'Save -> Restart device'. Below these options are two buttons: 'Execute' (highlighted in blue) and 'Cancel'.

8. จากนั้นเครื่องพิมพ์จะพิมพ์ใบ Network Status ออกมา ให้ดูที่ 9100 Multi Session: Enable

```
*****  
Network Configuration  
*****  
  
MAC Addr : 00:11:62:13:A4:45  
  
IP Address           : 0.0.0.0  
Subnet Mask          : 0.0.0.0  
Default Gateway     : 0.0.0.0  
DHCP                 : ENABLE  
  
"user" Login Password : "guest"  
"root" Login Password : "*****"  
Web Refresh Time (Sec.) : 5  
9100 Multi Session   : ENABLE  
9100 Data Timeout (Sec.) : 0  
Disconnect Message   : ENABLE  
  
<< DIPSW Setting >>  
DSW1-3=ON : DHCP Timeout : ENABLE  
DSW1-2=ON : Comm Diagnosis : DISABLE  
  
*****  
Current IP Parameters Status  
*****  
IP Address       : 192.168.2.74 (DHCP)  
Subnet Mask      : 255.255.255.0  
Default Gateway  : 192.168.2.1
```