


How to set TSP100IIIW connect to Router by STAR Quick Setup Utility

****Please install STAR Quick Setup Utility on your smartphone/tablet****

****Please noted, TSP143IIIW model is not supported 5GHz****


1. Connect printer to your device via WiFi Setting (**check WiFi name from Self-Test**)

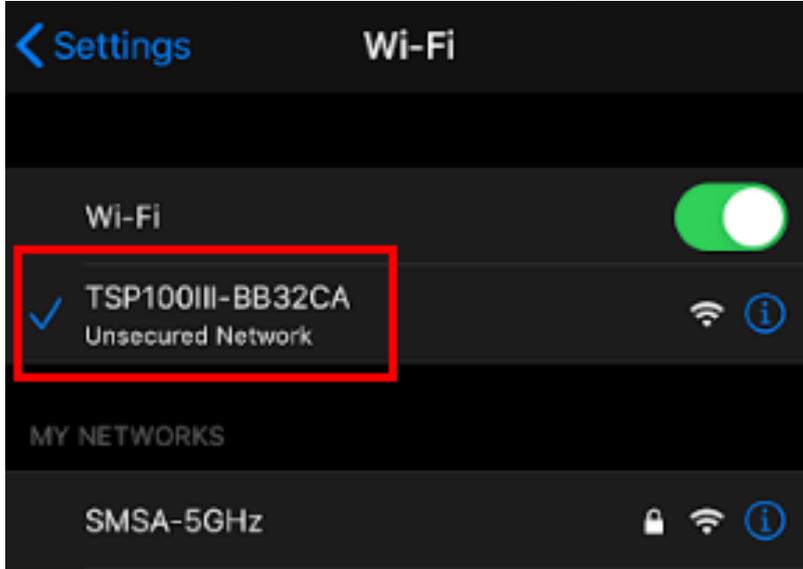


2. Go to STAR Quick Setup Utility and click 'Select Device' for select the printer which you connecting.




3. Click the only one printer that you found on the application then click 'Yes'

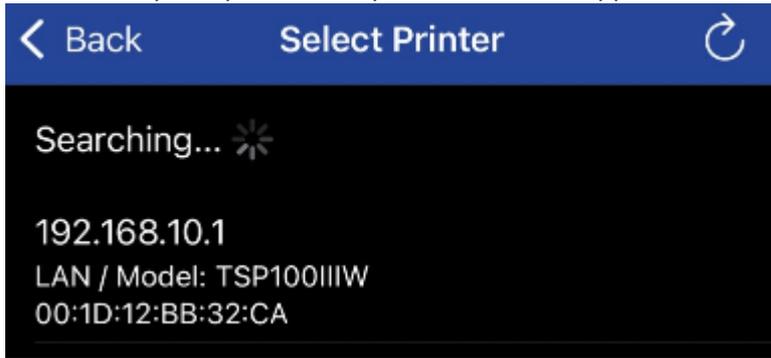


4. Click 'Printer Setting'

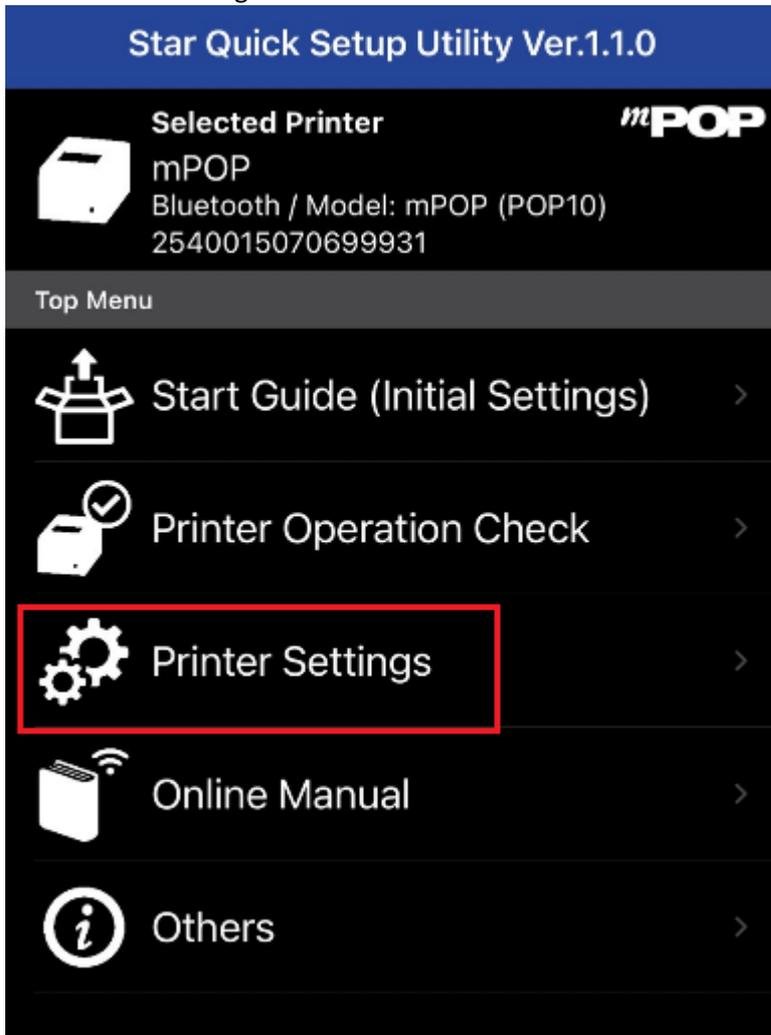


5. Click 'Network Setting' then will be automatic to access the browser

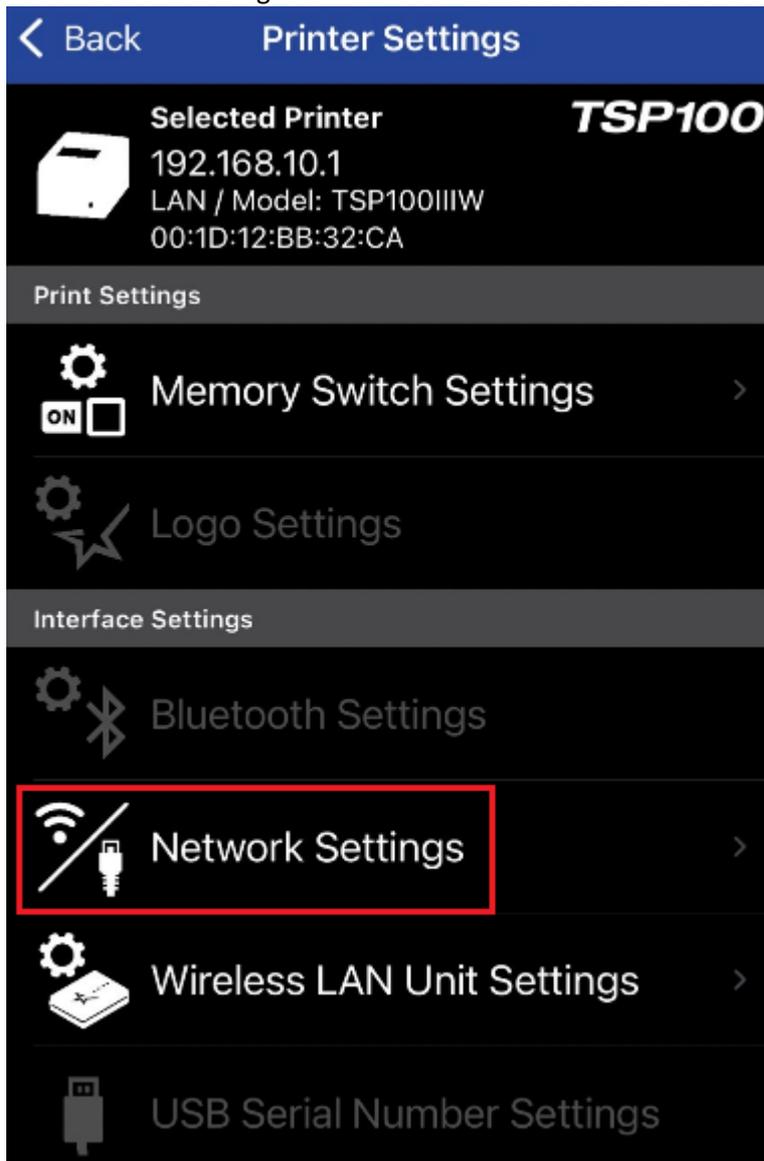


6. Click button on the left top > Login by **Username:** root / **Password:** public

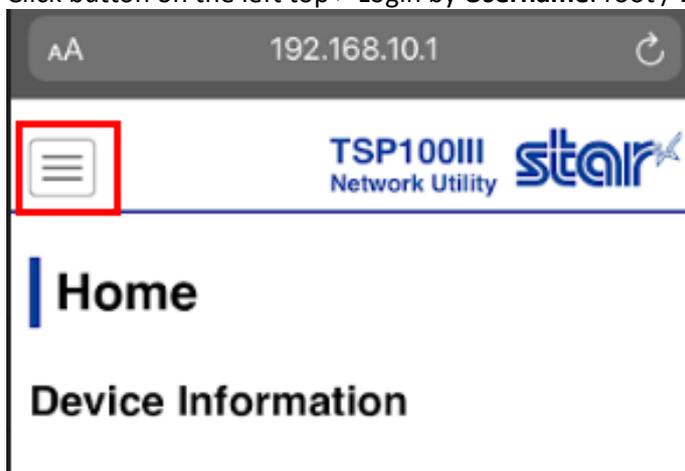

7. Click button same as No.6 again then click 'WLAN Setting'

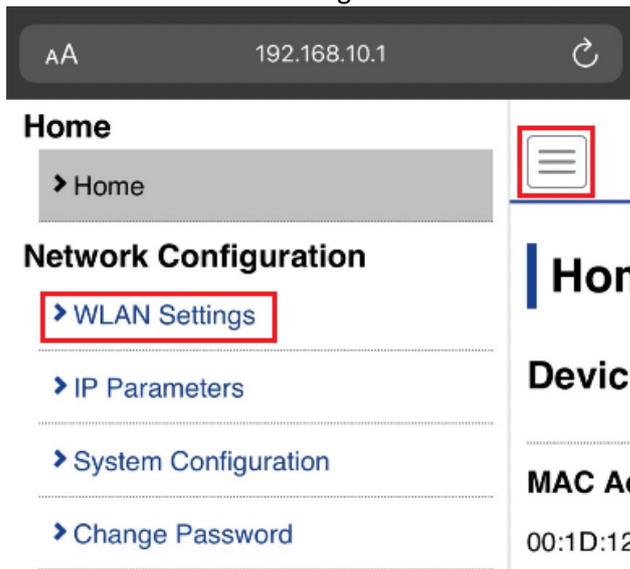

8. Select 'Infrastructure Mode'
- Enter your WiFi Name in **SSID**
 - Select your security (**Check from your router properties**)
 - Enter your WiFi password in **Security Key (If no password, No enter)**
 - Click 'Submit'

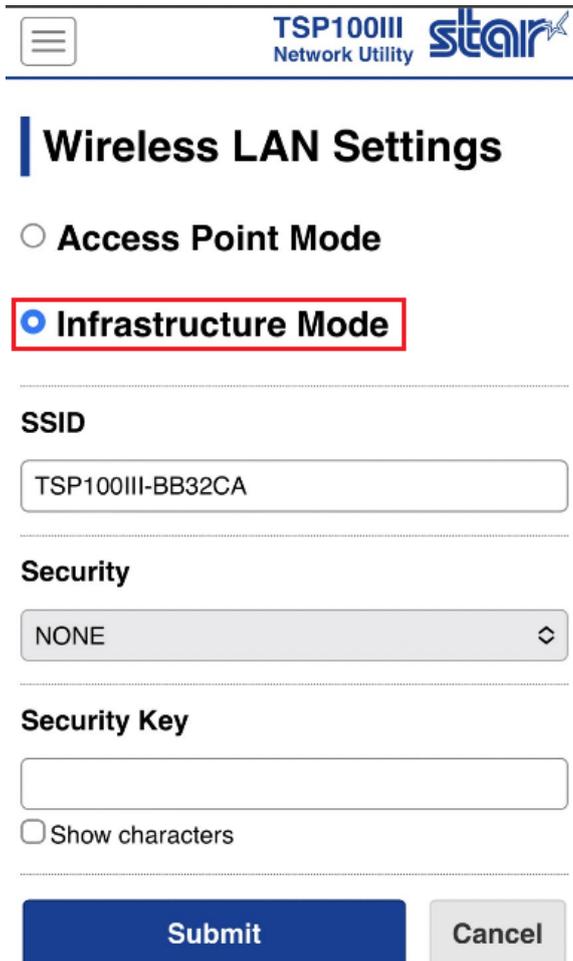

9. Check your WiFi information again, if okay click 'Save'



TSP100III Network Utility 

Wireless LAN settings are accepted!

NetworkMode :
Infrastructure Mode

SSID :
SMSA

Security Type :
WPA2/AES

Security Key :
[REDACTED]

Please execute **"Save"** menu if these settings are correct.

10. Select 'Save > Configuration Printing > Restart Device' then click 'Execute'



TSP100III Network Utility 

Save

Save → Configuration printing → Restart device

Save → Restart device

Execute **Cancel**

11. After printer restarted, will be automatic printed out Network Configuration and get DHCP IP Address from WiFi Router.

