



คู่มือการใช้งานเปิด Auto connection


1. ดาวน์โหลดแอป [Star Quick Setup Utility](#) จาก App Store หรือ Google Play.

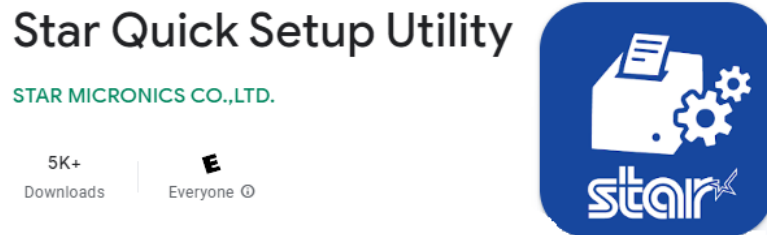

2. เปิดแอป [Star Quick Setup Utility](#) จากนั้นกด 'Selected Printer'

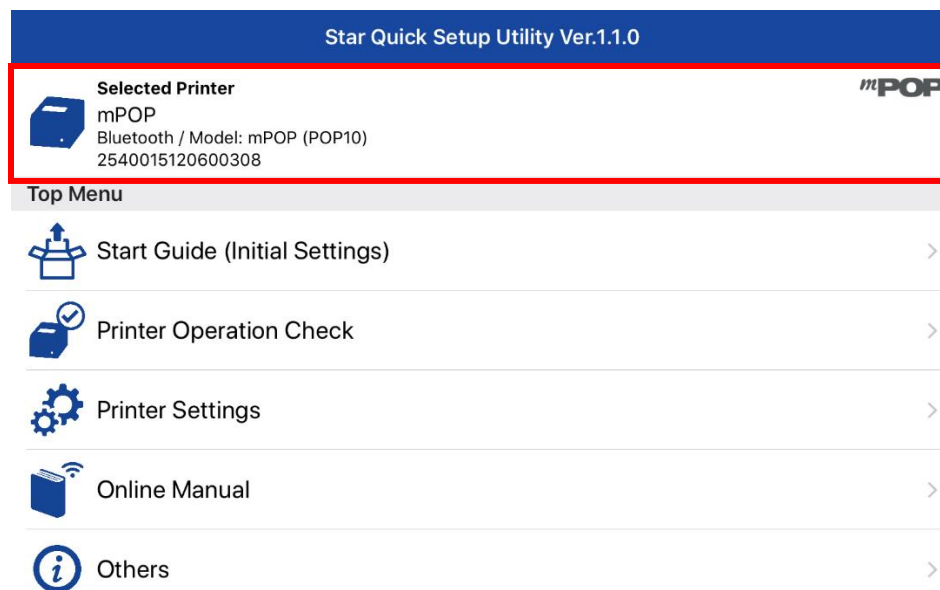


3. เลือกเครื่องพิมพ์ที่ต้องการเชื่อมต่ออยู่

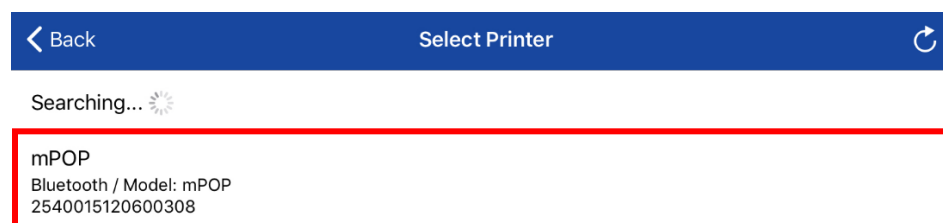






4. กด 'Printer Setting'.

Star Quick Setup Utility Ver.1.1.0

Selected Printer **mPOP**

 mPOP
Bluetooth / Model: mPOP (POP10)
2540015120600308


Top Menu

-  Start Guide (Initial Settings) >
-  Printer Operation Check >
-  **Printer Settings** >
-  Online Manual >
-  Others >


5. กด 'Bluetooth Setting'

← Back Printer Settings


Selected Printer **mPOP**

 mPOP
Bluetooth / Model: mPOP (POP10)
2540015120600308


Print Settings

-  Logo Settings >

Interface Settings

-  **Bluetooth Settings** >

6. กดตั้งค่า Auto Connection ให้เปิดหรือปิด จากนั้นกด apply เพื่อบันทึกการตั้งค่า

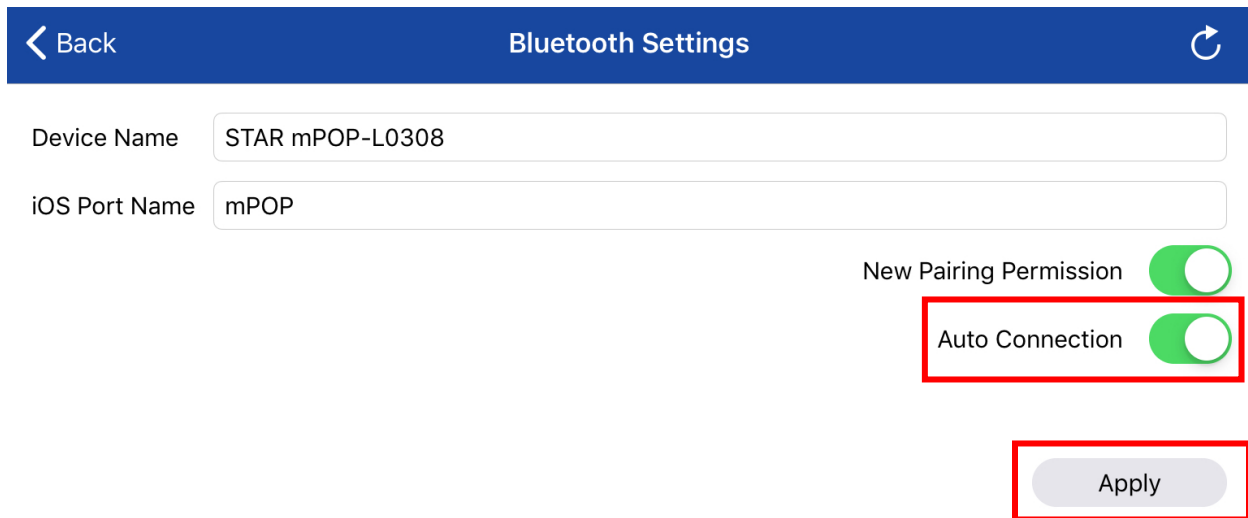

The screenshot shows the Bluetooth Settings interface. At the top, there is a blue header with a back arrow, the text "Bluetooth Settings", and a refresh icon. Below the header, there are two input fields: "Device Name" with the value "STAR mPOP-L0308" and "iOS Port Name" with the value "mPOP". To the right of these fields, there are two toggle switches: "New Pairing Permission" (turned on) and "Auto Connection" (turned on). The "Auto Connection" toggle is highlighted with a red box. Below the toggles, there is an "Apply" button, also highlighted with a red box.

Device Name : Alphanumeric characters and symbols. (1 to 16 letters.) *In case of blank, it will not be changed.

iOS Port Name : Alphanumeric characters and symbols. (1 to 16 letters.) *In case of blank, it will not be changed.

*If the multiple printers which have the same printer name are paired, you cannot change settings. Please cancel pairing for printers other than the printer you would like to change.

7. กดยืนยันกับกล่องข้อความที่ขึ้นมาจนขึ้นว่า Success แล้วจึงกด OK

